

User Manual

VDA-14

4K HDMI Splitter 1x4



All Rights Reserved

Version: VDA-14_2017V1.0

Preface

Read this user manual carefully before using the product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product.

This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated till November 3, 2017. In the constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation. Please refer to the dealers for the latest details.

Trademarks

Product model and logo are trademarks. Any other trademarks mentioned in this manual are acknowledged as the properties of the trademark owner. No part of this publication may be copied or reproduced without the prior written consent.

FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference.

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



SAFETY PRECAUTIONS

To insure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

Contents

1. Introduction	1
1.1 Introduction to VDA-14	1
1.2 Features	1
1.3 Packing List	1
2. Panel Description	2
3. System Connection	4
3.1 Usage Precautions	4
3.2 System Diagram	4
3.3 Connection Procedures	4
3.4 EDID Management	5
3.5 Application	5
4. Specification	6
5. Panel Drawing	8
6. Troubleshooting & Maintenance	9
7. Customer Service	10

1. Introduction

1.1 Introduction to VDA-14

VDA-14 is a HDMI splitter featuring the capability to repeat HDMI or DVI source to 4 displays synchronously. Compliance with HDMI 2.0& HDCP2.2, VDA-14 provides comprehensive resolution capacities up to 4K& 1080p 3D. It's capable to automatically recognize the resolution and HDCP compliant status of the input signal. Input signal will be automatically equalized for reliable transmission with proper EDID Management.

Moreover, VDA-14 supports convenient online update through USB port.

1.2 Features


- 4 simultaneous HDMI outputs
- Support Hot-plug
- Support HDMI2.0& HDCP2.2 and is backwards compatible with all previous HDMI standards
- Transmit 4Kx2K signal for 10m via AWG24 HDMI cable
- High bandwidth: 18Gbps
- HDCP compliant
- Auto-identify input resolution
- Support EDID management, automatically adopt the resolution of the first detected display from port 1~4
- Intuitive indicator for connection status& input HDCP compliance status
- Convenient online firmware update

1.3 Packing List

- 1 x VDA-14
- 2 x Mounting ears
- 4 x Screws
- 4 x Plastic cushions
- 1 x Power Adapter (DC 5V 2A)
- 1 x User Manual

Note: Please confirm if the product and the accessories are all included, if not, please contact with the dealers.

2. Panel Description

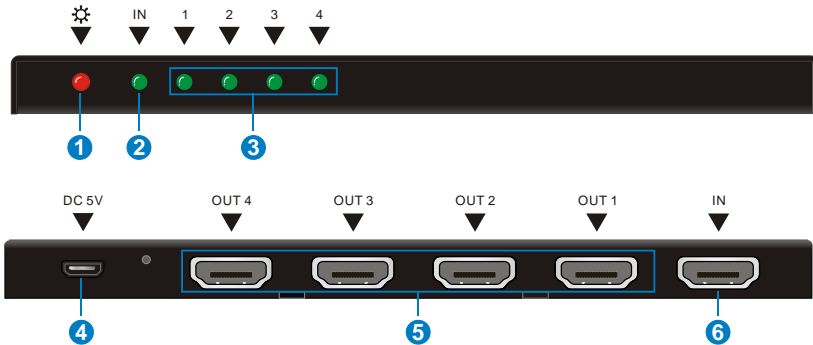

No.	Name	Description
①	Power indicator	Illuminate red once powered on.
②	Input HDCP compliant Indicator	Indicate the HDCP compliant status of the input signal. <ul style="list-style-type: none"> ➤ OFF: No HDMI traffic (no picture) or abnormal link. ➤ GREEN: Traffic with HDCP. ➤ Blinking GREEN: Traffic without HDCP.
③	Output signal Indicators	Illuminate green when there is HDMI output, correspond to HDMI OUTPUT 1~4 separately.
④	DC 5V	Micro USB port, plug a DC 5V power adapter for power or plug a U-disk for firmware updating. Note: Firmware updated need auxiliary equipment, please contact with our after-sales department for more details.
⑤	OUT 1~OUT 4	HDMI output ports, connect to HDMI displays, automatically capture the input resolution.
⑥	IN	HDMI input port. Connect with HDMI or DVI source device such as DVD/ Blue-ray.

Note:

- a) Pictures shown in this manual are for reference only, different model and specifications are subject to real product.
- b) Output HDCP compliant status depends on input signal. When the input signal is with HDCP, then output signal is with HDCP and vice versa.

- c) HDMI signal contains both HDMI video signal and embedded audio signal (PCM, Dolby Digital, DTS, DTS-HD), while DVI signal contains solely video signal.
- d) VDA-14 is capable to switch input signal format according to the displays.
For example, when the input signal is HDMI and the display can only support DVI signal, VDA-14 will switch the signal into DVI format.
- e) EDID Management: automatically manage output signal (e.g. output resolution) to fit all displays.


3. System Connection

3.1 Usage Precautions

- ① System should be installed in a clean environment and has a prop temperature and humidity.
- ② All of the power switches, plugs, sockets and power cords should be insulated and safe.
- ③ All devices should be connected before power on.

3.2 System Diagram

The following diagram illustrates typical input and output connections that can be utilized with VDA-14:

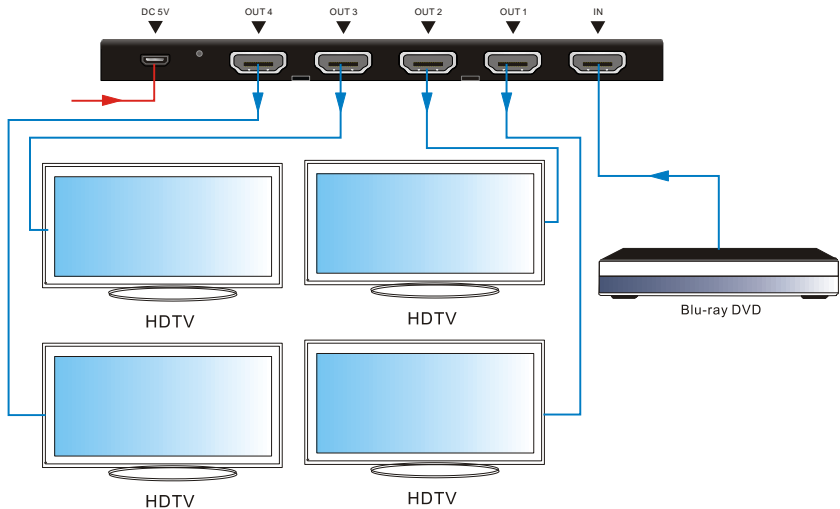

3.3 Connection Procedures

- Step1.** Connect a HDMI/ DVI source device (e.g. Blue-ray DVD) to the **IN** socket of VDA-14 with HDMI cable.
- Step2.** Sequentially connect HDMI displays to OUT 1 ~ OUT 4 sockets of VDA-14 with HDMI cables.
- Step3.** Plug a DC 5V power adapter to the power port of VDA-14.

Note: All the ports support hot-plug. It's important to know that hot plugging a display may result in splash screen at all connected output devices.

3.4 EDID Management

VDA-14 comprises 1 HDMI input port & 4 HDMI output ports, and it possess built-in EDID management function.

- ① When all output ports are connected with displays, the source device will gain the EDID data from the display connected output 1 port. At this point, if you disconnect the output 1 display and want the source device to gain the EDID from the output 2, the VDA-14 need to be restarted.
- ② All connected displays should be compatible, for example: when output 1 connects with a 1080p display, VDA-14 will select 1080p as output resolution and distribute 1080p signal to displays connected to output 1~4. If the display connected to output 2 don't support 1080p signal, there will be no output on the display.

3.5 Application

VDA-14 has a good application in various occasions, such as computer realm, monitoring, conference room, big screen displaying, television education, command & control center and smart house etc.

4. Specification


Video Input	
Input	1 HDMI
Input Connector	1 female type A HDMI 2.0
Video Output	
Output	4 HDMI
Output Connector	4 female type A HDMI 2.0
Video General	
Max data rate	18Gbit/s
Max Resolution	4Kx2K@60Hz 4:4:4
HDCP	Compliant with HDCP2.2,and is backward compatible to HDCP1.4
EDID	In-built EDID management
HDMI Embedded Audio	Support Dolby D (True HD)/ DTS (HD-Master Audio)/ PCM.
General	
Temperature	0~ 55°C
Reference Humidity	10% ~ 90%
Power Consumption	6.5W (Max)
Power	Input:100V~240V AC; Output: DC5V 2A
Dimension (W*H*D)	152mmx 11mmx 70mm
Weight	140g

Supported Input Video Formats:

Input Resolution	HDMI	DVI
720 x 480@60Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
720 x 480I@30Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
720 x 576@50Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
720 x 576I@25Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1280 x720@50Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1280 x720@60Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1920 x 1080@25Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1920 x 1080@50Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1920 x 1080@60Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1920 x 1080I@25Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1920 x 1080I@30Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3840 x 2160@25Hz	<input checked="" type="checkbox"/>	
3840 x 2160@30Hz	<input checked="" type="checkbox"/>	
3840 x 2160@60Hz	<input checked="" type="checkbox"/>	
1080P 3D@60Hz	<input checked="" type="checkbox"/>	

Note: VDA-14 supports 4k& 3D HDMI signals, please adopt quality HDMI cables compliant with HDMI1.4 for better transmission when connecting 4K or 3D sources.

5. Panel Drawing

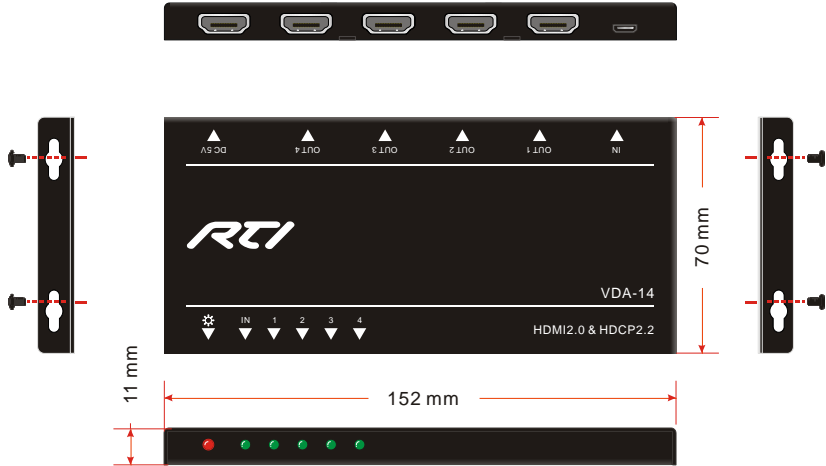

6. Troubleshooting & Maintenance

Problems	Potential Causes	Solutions
Color losing or no video signal output in HDMI display	The connecting cables may not be connected correctly or it may be broken.	Check whether the cables are connected correctly and in working condition.
	The display is not compatible with the present output resolution.	Make sure the resolution of the display(s) is compatible with the present resolution.
No HDMI signal output in VDA-14 while local HDMI input is in normal working state	The connecting cables may not be connected correctly or it may be broken.	Check whether the cables are connected correctly and in working condition.
Splash screen in output devices	Poor quality of the connecting cable	Change for another cable of good quality.
Static becomes stronger when connecting the video connectors	Bad grounding	Check the grounding and make sure it is connected well.

If your problem persists after following the above troubleshooting steps, seek further help from authorized dealer or our technical support.

7. Customer Service

The return of a product to our Customer Service implies the full agreement of the terms and conditions hereinafter. These terms and conditions may be changed without prior notice.

① **Warranty**

The limited warranty period of the product is fixed 3 (three) years.

② **Scope**

These terms and conditions of Customer Service apply to the customer service provided for the products or any other items sold by authorized distributor only.

③ **Warranty Exclusions:**

- Warranty expiration.
- Factory applied serial number has been altered or removed from the product.
- Damage, deterioration or malfunction caused by:
 - ✓ Normal wear and tear.
 - ✓ Use of supplies or parts not meeting our specifications.
 - ✓ No certificate or invoice as the proof of warranty.
 - ✓ The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
 - ✓ Damage caused by force majeure.
 - ✓ Servicing not authorized by distributor.
 - ✓ Any other causes which does not relate to a product defect.
- Shipping fees, installation or labor charges for installation or setup of the product.

④ **Documentation:**

Customer Service will accept defective product(s) in the scope of warranty coverage at the sole condition that the defect has been clearly defined, and upon reception of the documents or copy of invoice, indicating the date of purchase, the type of product, the serial number, and the name of distributor.

Remarks: For further assistance or solutions, please contact your local distributor.



Remote Technologies Incorporated

5775 12th Avenue East, Suite 180

Shakopee, MN 55379

Tel: 952-253-3100

Fax: 952-253-3131

www.rticorp.com