

Companion Add-on Ceiling Mic for Apollo Video Bar

APO-SKY-MIC

WyreStorm

Quickstart Guide


💡 WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.

⚠️ IMPORTANT! Installation Requirements

- Visit the product page to download the latest firmware, document version, additional documentation, and configuration tools.

In the Box

- 1x APO-SKY-MIC Microphone
- 1x Ceiling Mounting Kit
- 1x Quickstart Guide

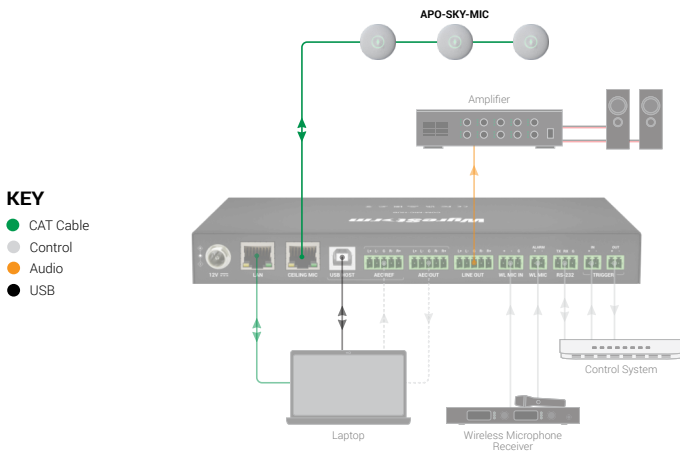

KEY

- CAT Cable
- Control
- Audio
- USB

Cascade Microphones

Users have the ability to cascade microphones up to a maximum of three times. Pair each APO-SKY-MIC with an APO-MIC-EXT to extend up to 60m over Cat6 cable.

Troubleshooting

No Audio Input or Output

- Verify the cables are seated securely
- Verify that audio mute is not enabled in the software or connected device's webUI

Specifications

Audio and Video	
Inputs	1x 8-Pin RJ45 Female
Outputs	1x 8-Pin RJ45 Female
Microphone	4x Circular Microphone Arrays with AEC and AGC
Communication and Control	
Mute	1x Mute Button
USB	1x USB-C for firmware upgrade
Power	
Power Supply	Powered by the APO-VX20-UC or COM-MIC-HUB
Environmental	
Operating Temperature	0 to +45°C (32 to +113 °F), 10% to 90%, non-condensing
Storage Temperature	-20 to +70°C (-4 to +158 °F), 10% to 90%, non-condensing
Dimensions and Weight	
Height x Width x Depth	26.5mm x 108mm x 108mm
Regulatory	
Safety and Emission	CE FCC RoHS RCM EAC UKCA

Warranty Information

WyreStorm Technologies ProAV Corporation warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on wyrestorm.com for more details on our limited product warranty.

