



*Custom Installation Buyer's Guide*  
2019 - 2020

**Klipsch**



# TABLE OF CONTENTS

## THX CINEMA SERIES

THX-8000-L	5
THX-8000-S	5
THX-5002-L	5
THX-5002-S	6
THX-504-L	6
THX-502-L	6

## PROFESSIONAL SERIES

PRO-180RPC LCR	8
PRO-180RPC	8
PRO-160RPC	9
PRO-250RPW LCR	9
PRO-180RPW	10
PRO-160RPW	10
PRO-25RW LCR	12
PRO-18RW	12
PRO-16RW	14
PRO-18RC	14
PRO-16RC	14
PRO-24RW LCR	15
PRO-14RW	15
PRO-14RC	15
PRO-1200SW	16
PRO-1000SW	16
PRO-800SW	16

## DESIGNER SERIES

DS-180CSM	18
DS-180CDT	18
DS-160CDT	18
DS-160CSM	19
DS-160C	19
DS-160W	19
DS-250W LCR	20

## CUSTOM SERIES

CS-16C II	20
CS-18C	21
CS-16CSM	21
CS-16W	21

## SHALLOW DEPTH

SLM-5400-C	22
SLM-3400-C	22

## ARCHITECTURAL ACCESSORIES

INSTALLATION KITS	24
GRILLE BRACKETS	26
FIRE RATED ENCLOSURES	26

## THX ULTRA SERIES

KL-650-THX	27
KL-525-THX	27
KS-525-THX	28
KW-120-THX	28
KA-1000-THX	28

## REFERENCE PREMIERE DESIGNER ON-WALL

RP-440D SB	30
RP-640D	30
RP-240D	31
RP-140D	31

## CUSTOMIZED HERITAGE THEATER BAR

CUSTOMIZED HERITAGE THEATER BAR	32
---------------------------------	----

## OUTDOOR SPEAKERS

AW-650	33
AW-525	33
CP-6	33
AW-400	34
PRO-650T-LS	34
PRO-500T-LS	34
PRO-12SW-LS	35
PRO-10SW-LS	35
ACCESSORIES	35
PRO-10SW-RK	37
PRO-650T-RK	38
PRO-500T-RK	38

## AMPLIFIERS


KDA-1000	40
KDA-500	40
KA-1000-THX	41
RSA-500	41
PRO-200A	42
AMAZON ECHO INPUT AMP	42

## SUBWOOFERS

C-310ASWI	44
C-308ASWI	44
PRO-1200SW	46
PRO-1000SW	46
PRO-800SW	46
KW-120-THX	47

## COMMERCIAL SPEAKERS

IC-800-T	47
IC-650-T	48
IC-525-T	48
IC-500-T-SC	48
IC-400-T	49
KPH-800	49
KPH-650	49
KPH-525	49
CP-6T	50
CA-800-T	51
CA-650-T	51
CA-525-T	52
CA-800-TSW	52

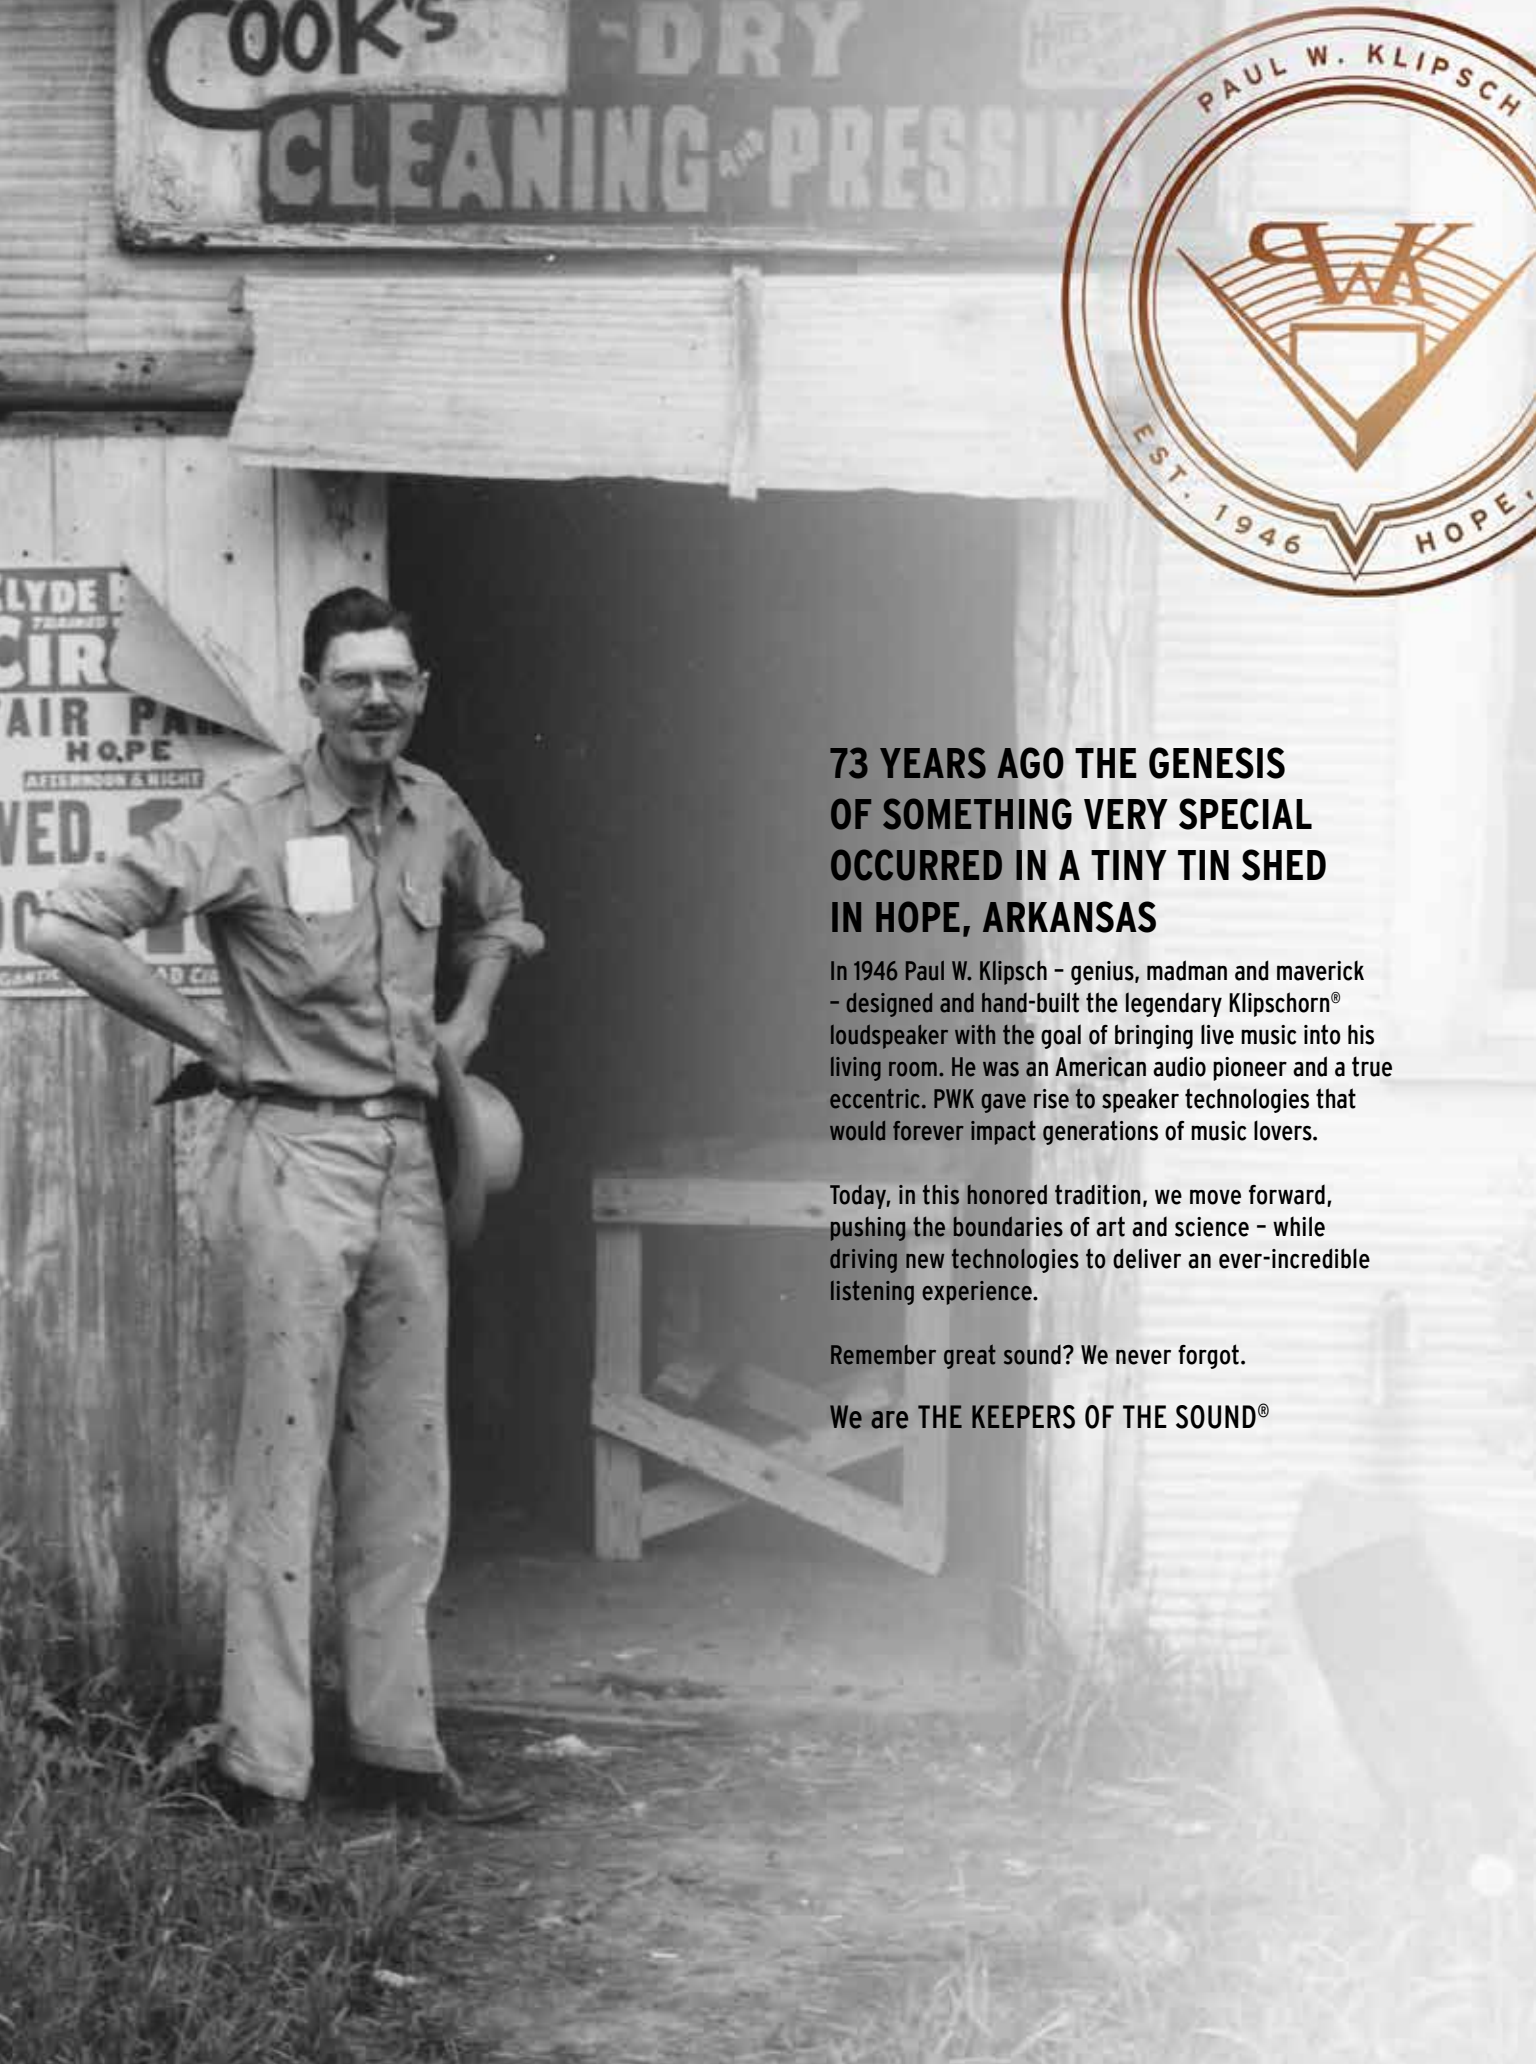

## **73 YEARS AGO THE GENESIS OF SOMETHING VERY SPECIAL OCCURRED IN A TINY TIN SHED IN HOPE, ARKANSAS**

In 1946 Paul W. Klipsch - genius, madman and maverick - designed and hand-built the legendary Klipschorn® loudspeaker with the goal of bringing live music into his living room. He was an American audio pioneer and a true eccentric. PWK gave rise to speaker technologies that would forever impact generations of music lovers.

Today, in this honored tradition, we move forward, pushing the boundaries of art and science - while driving new technologies to deliver an ever-incredible listening experience.

Remember great sound? We never forgot.

**We are THE KEEPERS OF THE SOUND®**

# THX<sup>®</sup>

ULTRA2<sup>™</sup>



*Don't say we didn't warn you*

*Once you hear it, you'll have to have it*

# THX® CINEMA SERIES

This extraordinary custom home theater series brings cinema-quality sound to the comforts of home by using Klipsch's renowned, professional-grade technology. These THX Ultra and Select certified speakers expertly deliver the raw explosiveness and fine detail of any film format and will shatter your expectations for home theater performance. The flat magnetic grille allows these in-wall and in-ceiling speakers to melt seamlessly into your home theater.

• THX Certified for high performance home cinema • THX Ultra and THX Select Certified models



- THX Ultra Certified in-wall LCR speaker for rooms over 3000 cubic feet
- Cinema quality sound in an architectural format
- Fully enclosed back box
- Flat, magnetic, paintable grille



- THX Ultra Certified in-wall surround speaker for rooms over 3000 cubic feet
- Cinema quality sound in an architectural format
- Fully enclosed back box
- Wide Dispersion Sound Technology (WDST)
- Flat, magnetic, paintable grille



- THX Ultra Certified in-wall LCR speaker for rooms over 3000 cubic feet
- Cinema quality sound in an architectural format
- Fully enclosed back box
- Flat, magnetic, paintable grille

## THX-8000-L 8" IN-WALL LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	80Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2300Hz
<b>POWER HANDLING (CONT/PEAK)</b>	150W /600W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium dome compression driver mated to 80° x 80° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	8" (20cm) Aluminum Cone Woofer
<b>DIMENSIONS</b>	20.63" (52.4cm) H x 11.63" (29.54cm) W
<b>MOUNTING DEPTH</b>	3.88" (9.85cm)
<b>CUTOUT DIMENSIONS</b>	19.13" (48.59cm) H x 10.12" (25.7cm) W
<b>WEIGHT</b>	17.5 lbs. (7.9kg)
<b>INSTALLATION KIT</b>	IK-802-W (sold separately)

## THX-8000-S 8" IN-WALL SURROUND SPEAKER

<b>FREQUENCY RESPONSE</b>	80Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	90dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2130Hz
<b>POWER HANDLING (CONT/PEAK)</b>	100W /400W
<b>HIGH FREQUENCY DRIVER</b>	Two 1" (2.5cm) Titanium dome neodymium tweeters in a diffuse Tractrix horn array
<b>LOW FREQUENCY DRIVER</b>	8" (20cm) Aluminum Cone Woofer
<b>DIMENSIONS</b>	20.63" (52.4cm) H x 11.63" (29.54cm) W
<b>MOUNTING DEPTH</b>	3.88" (9.85cm)
<b>CUTOUT DIMENSIONS</b>	19.13" (48.59cm) H x 10.12" (25.7cm) W
<b>WEIGHT</b>	17.5 lbs. (7.9kg)
<b>INSTALLATION KIT</b>	IK-802-W (sold separately)

## THX-5002-L DUAL 5.25" IN-CEILING LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	45Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	93dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	1200 Hz & 1800 Hz
<b>POWER HANDLING (CONT/PEAK)</b>	100W /400W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) Titanium tweeter in a 7.5 x 3.75" 60-90-110 VCT 45° Skewed horn
<b>LOW FREQUENCY DRIVER</b>	Two 5.25" (16.51cm) Cerametallic Woofers
<b>DIMENSIONS</b>	Ø 14.89" (37.82cm)
<b>MOUNTING DEPTH</b>	9.23" (23.44cm)
<b>CUTOUT DIMENSIONS</b>	Ø 13.39" (34.01cm)
<b>WEIGHT</b>	12 lbs (5.4kg)
<b>INSTALLATION KIT</b>	IK-502-C (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 9 kg  
19.9 lbs

**PART NUMBER**

1066109



**NOTES:**

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 8.57 kg  
18.9 lbs

**PART NUMBER**

1066110



**NOTES:**

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 7.2 kg  
15.9 lbs

**PART NUMBER**

1066119



**NOTES:**



- THX Ultra Certified in-ceiling surround speaker for rooms over 3000 cubic feet
- Cinema quality sound in an architectural format
- Fully enclosed back box
- Wide Dispersion Sound Technology (WDST)
- Flat, magnetic, paintable grille

### THX-5002-S DUAL 5.25" IN-CEILING SURROUND SPEAKER

<b>FREQUENCY RESPONSE</b>	45Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	93dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2500Hz
<b>POWER HANDLING (CONT/PEAK)</b>	100W /400W
<b>HIGH FREQUENCY DRIVER</b>	Two 1" Titanium tweeters in vertically stacked Tractrix horns
<b>LOW FREQUENCY DRIVER</b>	Two 5.25" (16.51cm) Cerametallic Woofers
<b>DIMENSIONS</b>	Ø 14.89" (37.82cm)
<b>MOUNTING DEPTH</b>	9.23" (23.44cm)
<b>CUTOUT DIMENSIONS</b>	Ø 13.39" (34.01cm)
<b>WEIGHT</b>	11 lbs. (5.0kg)
<b>INSTALLATION KIT</b>	IK-502-C (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 6.3 kg  
 13.9 lbs  
**PART NUMBER**  
 1066125



**NOTES:**



- THX Select Certified in-wall speaker for rooms up to 2000 cubic feet
- Cinema quality sound in an architectural format
- Flat, magnetic, paintable grille

### THX-504-L QUAD 5.25" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	46Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	250 Hz & 2100 Hz
<b>POWER HANDLING (CONT/PEAK)</b>	150W /600W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium diaphragm compression driver mated to 90° x 90° square Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Four 5.25" (13.3cm) high-output, fiberglass cone woofers
<b>DIMENSIONS</b>	28.88" (73.35cm) H x 8.13" (20.65cm) W
<b>MOUNTING DEPTH</b>	3.52" (8.94cm)
<b>CUTOUT DIMENSIONS</b>	27.24" (69.19cm) H x 6.5" (16.51cm) W
<b>WEIGHT</b>	18.3 lbs (8.3kg)
<b>INSTALLATION KIT</b>	IK-504-W (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 9 kg  
 19.9 lbs  
**PART NUMBER**  
 1066127



**NOTES:**



- THX Select Certified in-wall speaker for rooms up to 2000 cubic feet
- Cinema quality sound in an architectural format
- Flat, magnetic, paintable grille

### THX-502-L DUAL 5.25" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	46Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2100Hz & 1200Hz
<b>POWER HANDLING (CONT/PEAK)</b>	100W /400W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium diaphragm compression driver mated to 90° x 90° square Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Dual 5.25" (13.3cm) high-output, fiberglass cone woofers
<b>DIMENSIONS</b>	17.98" (45.66cm) H x 8.11" (20.59cm) W
<b>MOUNTING DEPTH</b>	3.49" (8.86cm)
<b>CUTOUT DIMENSIONS</b>	16.42" (41.7cm) H x 6.57" (16.68cm) W
<b>WEIGHT</b>	9.6 lbs (4.4kg)
<b>INSTALLATION KIT</b>	IK-502-W or IK-502-W II (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 5.4 kg  
 11.9 lbs  
**PART NUMBER**  
 1066128



**NOTES:**

SECUREFIT



*Legendary*  
**Reference**  
*Premiere Sound*

*SecureFit™ installation system, bezel-free magnetic grilles*

**Klipsch**  
REFERENCE  
PREMIERE

PROFESSIONAL  
SERIES



# PROFESSIONAL SERIES REFERENCE PREMIERE

Using the same acoustic components and horn material as the highly acclaimed Reference Premiere box speaker line, the Professional Reference Premiere Architectural series perfectly combines the aesthetics of an architectural speaker with the pure performance and dynamic voicing of the Reference Premiere series.



## IN-CEILING



- Angled In-Ceiling LCR speaker for home theater or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

### PRO-180RPC LCR 8" IN-CEILING LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	52Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	96dB @1M, @2.83V
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	Angled 1" (2.54cm) titanium dome tweeter mated to a composite coated FEA optimized horn
<b>LOW FREQUENCY DRIVER</b>	Angled 8" (20.32cm) Cerametallic woofer, angled 45°
<b>DIMENSIONS</b>	12.7" W x 12.7" H x 5.89" D (32.3cm H x 32.3cm W x 15cm D)
<b>MOUNTING DEPTH</b>	5.68" (14.4cm)
<b>CUTOUT DIMENSIONS</b>	11.57" (29.4cm)
<b>WEIGHT</b>	8.4lbs. (3.8kg)
<b>INSTALLATION KIT</b>	IK-810-C (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	4.3 kg 9.5 lbs
<b>PART NUMBER</b>	1063968



NOTES:



- In-Ceiling speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

### PRO-180RPC 8" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	52Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	96dB @1M, @2.83V
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium dome tweeter mated to a composite coated round Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) Cerametallic woofer
<b>DIMENSIONS</b>	10.89" W x 10.89" H x 4.83" D (27.7cm H x 27.7cm W x 12.3cm D)
<b>MOUNTING DEPTH</b>	4.58" (11.6cm)
<b>CUTOUT DIMENSIONS</b>	9.72" (24.7cm)
<b>WEIGHT</b>	7.4lbs. (3.36kg)
<b>INSTALLATION KIT</b>	IK-800-C or IK-800-C II (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.9kg 8.6 lbs
<b>PART NUMBER</b>	1063967



NOTES:



- In-Ceiling speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

### PRO-160RPC 6.5" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	56Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	95dB @1M, @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium dome tweeter mated to a composite coated round Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Cerametallic woofer
<b>DIMENSIONS</b>	9.31" W x 9.31" H x 4.71" D (23.7cm H x 23.7cm W x 12cm D)
<b>MOUNTING DEPTH</b>	4.46" (11.3cm)
<b>CUTOUT DIMENSIONS</b>	8.15" (20.7cm)
<b>WEIGHT</b>	7lbs. (3.18kg)
<b>INSTALLATION KIT</b>	IK-650-C or IK-650-C II (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.7 kg 8.15 lbs
<b>PART NUMBER</b>	1063966



NOTES:

## IN-WALL



- In-Wall LCR speaker for home theater or 2-channel listening
- SecureFit™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included

### PRO-250RPW LCR DUAL 5.25" IN-WALL LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	46Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	94dB @1M, @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	90° x 90°
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium dome tweeter mated to a composite coated hybrid cross section Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	Dual 5.25" (13.34cm) Cerametallic woofers
<b>DIMENSIONS</b>	7.65" W x 17.53" H x 3.81" D (19.4cm H x 44.5cm W x 9.7cm D)
<b>MOUNTING DEPTH</b>	3.68" (9.3cm)
<b>CUTOUT DIMENSIONS</b>	6.5" H X 16.38" W (16.5cm H X 41.6cm W)
<b>WEIGHT</b>	6.5 lbs. (2.95kg)
<b>INSTALLATION KIT</b>	IK-502-W or IK-502-W II (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.5 kg 7.7 lbs
<b>PART NUMBER</b>	1063965



NOTES:



- In-Wall speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included

### PRO-180RPW 8" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	52Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	96dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	90° x 90°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a 90°x90° Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) Cerametallic woofer
<b>DIMENSIONS</b>	10.3" W x 15.89" H x 4.01" D (26.2cm H x 40.4cm W x 10.2cm D)
<b>MOUNTING DEPTH</b>	3.88" (9.9cm)
<b>CUTOUT DIMENSIONS</b>	9.13" H X 14.72" W (23.2cm H X 37.4cm W)
<b>WEIGHT</b>	7.9 lbs. (3.6kg)
<b>INSTALLATION KIT</b>	IK-800-W or IK-800-W II (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 4.1 kg  
 9 lbs  
**PART NUMBER**  
 1064064



**NOTES:**



- In-Wall speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included

### PRO-160RPW 6.5" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	56Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	90° x 90°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium dome tweeter mated to a composite coated hybrid cross section Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Cerametallic woofer
<b>DIMENSIONS</b>	9.1" W x 14.22" H x 3.9" D (23.1cm H x 36.1cm W x 9.9cm D)
<b>MOUNTING DEPTH</b>	3.77" (9.6cm)
<b>CUTOUT DIMENSIONS</b>	7.95" H X 13.07" W (20.2cm H X 33.2cm W)
<b>WEIGHT</b>	7.2 lbs. (3.25kg)
<b>INSTALLATION KIT</b>	IK-650-W or IK-650-W II (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 3.75 kg  
 8.26 lbs  
**PART NUMBER**  
 1063963



**NOTES:**



Legendary  
**Reference**  
Sound

*SecureFit™ installation system, bezel-free magnetic grilles*

**Klipsch**  
REFERENCE

PROFESSIONAL  
SERIES

# PROFESSIONAL SERIES REFERENCE

Using the same acoustic components and horn material as the highly acclaimed Reference Premiere box speaker line, the Professional Reference Series perfectly combines the aesthetics of an architectural speaker with the pure performance and dynamic voicing of the Reference series.

- True Reference acoustics • SecureFit™ Installation System • Minimal footprint models available



## IN-WALL



- In-wall LCR speaker for home theater or 2-channel listening
- SecureFit™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included

### PRO-25RW LCR DUAL 5.25" IN-WALL LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	50Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	93dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a 90°x90° Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	Dual 5.25" (16.51cm) IMG woofers
<b>DIMENSIONS</b>	7.65" W x 17.53" H x 3.81" D (19.4cm H x 44.5cm W x 9.7cm D)
<b>MOUNTING DEPTH</b>	3.68" (9.3cm)
<b>CUTOUT DIMENSIONS</b>	6.5" W X 16.38" H (16.5cm W X 41.6cm H)
<b>WEIGHT</b>	6.5 lbs. (2.95kg)
<b>INSTALLATION KIT</b>	IK-502-W or IK-502-W II (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.5 kg 7.7 lbs
<b>PART NUMBER</b>	1064445



NOTES:



- In-wall speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included

### PRO-18RW 8" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	56Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	95dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a 90°x90° Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) IMG woofer
<b>DIMENSIONS</b>	10.3" W x 15.89" H x 4.0" D (26.2cm H x 40.4cm W x 10.2cm D)
<b>MOUNTING DEPTH</b>	3.88" (9.9cm)
<b>CUTOUT DIMENSIONS</b>	9.13" W X 14.72" H (23.2cm W X 37.4cm H)
<b>WEIGHT</b>	7.9 lbs. (3.6kg)
<b>INSTALLATION KIT</b>	IK-800-W or IK-800-W II (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	4.1 kg 9 lbs
<b>PART NUMBER</b>	1064444



NOTES:



## SECUREFIT

With updated horns and drivers, New Klipsch Reference Professional and Reference Premiere Professional series speakers deliver all the power, detail and emotion of our **legendary** towers and monitors. A more robust bezel, the **SecureFit™** two-part system, provides for a simple installation while reducing overall baffle vibration by **45%**. Grille options and magnetic paint shield are included with the integrator in mind.



*Included with*

**Klipsch**  
REFERENCE | PROFESSIONAL  
SERIES

**Klipsch**  
REFERENCE  
PREMIERE | PROFESSIONAL  
SERIES



### PRO-16RW 6.5" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	60Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	93dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a round Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.5cm) IMG Woofer
<b>DIMENSIONS</b>	9.1" W x 14.22" H x 3.91" D (23.1cm H x 36.1cm W x 9.9cm D)
<b>MOUNTING DEPTH</b>	3.78" (9.6cm)
<b>CUTOUT DIMENSIONS</b>	7.95" W X 13.07" H (20.2cm W X 33.2cm H)
<b>WEIGHT</b>	7.2 lbs. (3.25kg)
<b>INSTALLATION KIT</b>	IK-650-W or IK-650-W II (sold separately)

- In-wall speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.75 kg 8.26 lbs
<b>PART NUMBER</b>	1064443



NOTES:

## IN-CEILING



### PRO-18RC 8" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	56Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	95dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a round Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) IMG woofer
<b>DIAMETER</b>	10.89" (27.7cm)
<b>CUTOUT DIAMETER</b>	9.72" (24.7cm)
<b>MOUNTING DEPTH</b>	6.35" (16.1cm)
<b>WEIGHT</b>	7.4 lbs. (3.36kg)
<b>INSTALLATION KIT</b>	IK-800-C or IK-800-C II (sold separately)

- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.8 kg 8.3 lbs
<b>PART NUMBER</b>	1064447



NOTES:



### PRO-16RC 6.5" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	63Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) aluminum dome tweeter mated to a round Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) IMG woofer
<b>DIAMETER</b>	9.31" (23.7cm)
<b>CUTOUT DIAMETER</b>	8.15" (20.7cm)
<b>MOUNTING DEPTH</b>	6.15" (15.6cm)
<b>WEIGHT</b>	7 lbs. (3.18kg)
<b>INSTALLATION KIT</b>	IK-650-C or IK-650-C II (sold separately)

- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SecureFit™ Installation System
- Round and square grilles included
- PVC Paint Shield included

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	3.6 kg 7.9 lbs
<b>PART NUMBER</b>	1064446



NOTES:

## MINIMAL FOOTPRINT IN-WALL



- In-wall LCR speaker for home theater or 2-channel listening
- Minimal visual footprint
- SkyHook™ Installation System
- Flat, magnetic grille
- PVC Paint Shield included



- In-wall speaker for home theater, distributed audio or 2-channel listening
- Minimal visual footprint
- SkyHook™ Installation System
- Flat magnetic grille
- PVC Paint Shield included

### PRO-24RW LCR MINIMAL FOOTPRINT DUAL 4" IN-WALL LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	68Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	89dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	30W /120W
<b>HIGH FREQUENCY DRIVER</b>	.75" (1.9cm) aluminum dome tweeter
<b>LOW FREQUENCY DRIVER</b>	Dual 4" (10.16cm) IMG Woofers
<b>DIMENSIONS</b>	6.36" W x 13.42" H x 3.32" D (16.2cm H x 34.1cm W x 8.4cm D)
<b>MOUNTING DEPTH</b>	3.17" (8.1cm)
<b>CUTOUT DIMENSIONS</b>	5.26" W X 12.35" H (13.4cm W X 31.4cm H)
<b>WEIGHT</b>	4.5 lbs. (2.1kg)
<b>INSTALLATION KIT</b>	IK-402-W (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	2.6 kg 5.73 lbs
<b>PART NUMBER</b>	1064449



NOTES:

### PRO-14RW MINIMAL FOOTPRINT 4" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	70Hz-23kHz +/- 3dB
<b>SENSITIVITY</b>	88dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	30W /120W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Silk dome tweeter mated to 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Dual 4" (10.2cm) Polypropylene Woofers
<b>DIMENSIONS</b>	6.38" W x 9.2" H x 3.56" D (16.2cm H x 23.4cm W x 9cm D)
<b>MOUNTING DEPTH</b>	3.41" (8.7cm)
<b>CUTOUT DIMENSIONS</b>	5.26" W X 8.13" H (13.4cm W X 20.7cm H)
<b>WEIGHT</b>	4lbs (1.8kg)
<b>INSTALLATION KIT</b>	IK-400-W (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	2.3 kg 5 lbs
<b>PART NUMBER</b>	1064450



NOTES:

## MINIMAL FOOTPRINT IN-CEILING



- In-wall speaker for home theater, distributed audio or 2-channel listening
- Minimal visual footprint
- SkyHook™ Installation System
- Round and square grilles included
- PVC Paint Shield included

### PRO-14RC MINIMAL FOOTPRINT 3.5" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	72Hz - 23kHz +/- 3dB
<b>SENSITIVITY</b>	88dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	30W /120W
<b>HIGH FREQUENCY DRIVER</b>	.75" (1.9cm) aluminum dome tweeter
<b>LOW FREQUENCY DRIVER</b>	3.5" (8.89cm) IMG woofer
<b>DIAMETER</b>	4.86" (12.4cm)
<b>CUTOUT DIAMETER</b>	4.21" (10.7cm)
<b>MOUNTING DEPTH</b>	3.89" (9.9cm)
<b>WEIGHT</b>	4 lbs. (1.8kg)
<b>INSTALLATION KIT</b>	IK-400-C (sold separately)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	2.3 kg 5 lbs
<b>PART NUMBER</b>	1064450



NOTES:





### PRO-1200SW 12" IN-WALL SUBWOOFER

<b>FREQUENCY RANGE</b>	21Hz -100Hz +/- 3dB *
<b>SYSTEM TYPE</b>	Sealed Box
<b>WOOFER</b>	12" (25.4cm) Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	112dB @ 70Hz
<b>POWER HANDLING</b>	250W RMS / 600W Peak
<b>IMPEDANCE</b>	8 ohms
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	65.75" H x 15.69" W x 3.47" D (1670.05mm x 398mm x 100mm)
<b>MOUNTING DEPTH</b>	3.4" (88.138mm)
<b>CUTOUT DIMENSIONS</b>	14.25" x 14.25" (361.95mm x 361.95mm)
<b>PRODUCT WEIGHT</b>	35.5 lbs (16.1 kg)

\* With Klipsch KDA Amplifier DSP Preset

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	16.6 kg 36.6 lbs
<b>PART NUMBER</b>	1064595

NOTES:

- Full stud-bay-in-wall subwoofer for new construction
- Ideal for home cinema or high performance distributed audio
- Easily installs into any standard stud-bay



### PRO-1000SW 10" IN-WALL SUBWOOFER

<b>FREQUENCY RANGE</b>	24-100Hz +/- 3dB *
<b>SYSTEM TYPE</b>	Sealed Box
<b>WOOFER</b>	10" (25.4cm) Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	109dB @ 70Hz
<b>POWER HANDLING</b>	200W RMS / 500W Peak
<b>IMPEDANCE</b>	8 ohms
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	21.97" x 17.56" x 4.0" (558mm x 448mm x 102mm)
<b>MOUNTING DEPTH</b>	3.94" (100mm)
<b>CUTOUT DIMENSIONS</b>	20.24" x 14.41" (514.096mm x 366.014mm)
<b>PRODUCT WEIGHT</b>	20.3 lbs (9.2 kg)

\* With Klipsch KDA Amplifier DSP Preset

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	9.8 kg 21.6 lbs
<b>PART NUMBER</b>	1063646

NOTES:

- 10" Long-throw Cerametallic™ woofer for superior low frequency response
- Performs as the anchor for a home theater system or a premium distributed audio solution
- MDF enclosure
- Flat, paintable, white magnetic grille
- Suitable for retrofit or new construction applications
- Compatible with the KDA-500 amplifier (see page XX)



### PRO-800SW 8" IN-WALL SUBWOOFER

<b>FREQUENCY RANGE</b>	38Hz -125Hz +/- 3dB
<b>SYSTEM TYPE</b>	Bandpass via flexible port tube
<b>WOOFER</b>	8" (203cm) Dual Voice Coil Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	103dB @ 70Hz
<b>POWER HANDLING</b>	125W RMS / 300W Peak
<b>IMPEDANCE</b>	2 x 8 ohms
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	Cabinet: 6.9" H x 21.1" W x 14.2" D (176mm x 536mm x 361mm) Grille: 5" (127mm)
<b>MOUNTING DEPTH</b>	7" (178mm)
<b>CUTOUT DIAMETER</b>	4.25" (108mm)
<b>PRODUCT WEIGHT</b>	22.1 lbs (10.1 kg)
<b>ACCESSORIES</b>	PRO-800SW Vent Boot Kit (Sold Separately)

\* With Klipsch KDA Amplifier DSP Preset

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	10.6 kg 23.4 lbs
<b>PART NUMBER</b>	1064594

NOTES:

- In-ceiling bandpass dual voice coil subwoofer for new construction or retrofit
- Minimal visual footprint
- Round and square grilles included
- Floor vent boot kit accessory (sold separately)



## **S** SKY HOOK<sup>™</sup> CINCH BY SWARM

Klipsch **Designer** series and **Custom** series speakers combine lighting-fast installation and great sound - with designer aesthetics in mind. Skyhook tool-free installation has been upgraded to SkyHook Cinch.

SkyHook Cinch provides a **75% faster** installation time and tighter, more flush fit to the surface installed even if it's uneven. Simply cut the hole, connect the speaker wire and push the speaker into place. One-click. That's it. The pre-tensioned dog-legs automatically engage and lock in place for solid, ultra reliable installation.



**Klipsch**  
DESIGNER SERIES



**Klipsch**  
CUSTOM SERIES

# Time is Money

*Super-fast Sky Hook<sup>™</sup> installation system, bezel-free magnetic grilles*

## DESIGNER SERIES

Using the same Tractrix® horn technology and design principles of our premium architectural and box speaker lines, the all new Klipsch Designer series delivers true Klipsch sound perfectly suited for distributed audio systems or small home theaters. These speakers utilize the fast, easy SkyHook™ tool-free installation system that reduces install time by up to 75%.

• SkyHook™ Installation System • Tractrix® Horn technology • Magnetic, bezel-free grilles



## IN-CEILING



- In-ceiling stereo speaker for distributed audio
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille



- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Controlled Dispersion Technology (CDT) allows tweeter and woofer to be aimed
- Flat, magnetic grille



- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Controlled Dispersion Technology (CDT) allows tweeter and woofer to be aimed
- Flat, magnetic grille

## DS-180CSM 8" STEREO IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	64Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	Dual .75" (1.9cm) silk dome tweeters
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) Polypropylene woofer
<b>DIAMETER</b>	10.88" (27.6cm)
<b>CUTOUT DIAMETER</b>	9.57" (24.3cm)
<b>MOUNTING DEPTH</b>	4.24" (10.8cm)
<b>WEIGHT</b>	7.4 lbs. (3.36kg)
<b>INSTALLATION KIT</b>	IK-800-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-800-C (sold separately)

## DS-180CDT 8" IN-CEILING PIVOTING SPEAKER

<b>FREQUENCY RESPONSE</b>	64Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) silk dome tweeter mated to a round Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) polypropylene woofer
<b>DIAMETER</b>	10.88" (27.6cm)
<b>CUTOUT DIAMETER</b>	9.57" (24.3cm)
<b>MOUNTING DEPTH</b>	4.66" (11.8cm)
<b>WEIGHT</b>	7.4 lbs. (3.36 kg)
<b>INSTALLATION KIT</b>	IK-800-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-800-C (sold separately)

## DS-160CDT 6.5" IN-CEILING PIVOTING SPEAKER

<b>FREQUENCY RESPONSE</b>	65Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) silk dome tweeter mated to a round Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Polypropylene woofer
<b>DIAMETER</b>	9.3" (23.6cm)
<b>CUTOUT DIAMETER</b>	7.99" (20.3cm)
<b>MOUNTING DEPTH</b>	4.41" (11.2cm)
<b>WEIGHT</b>	7 lbs. (3.18kg)
<b>INSTALLATION KIT</b>	IK-650-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-C (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.8 kg  
8.37 lbs

**PART NUMBER**

1064169

**SKY HOOK™**  
CINCH BY SWARM

**NOTES:**

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.8 kg  
8.37 lbs

**PART NUMBER**

1064167

**SKY HOOK™**  
CINCH BY SWARM

**NOTES:**

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.6 kg  
7.9 lbs

**PART NUMBER**

1064166

**SKY HOOK™**  
CINCH BY SWARM

**NOTES:**



- In-ceiling stereo speaker for distributed audio
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### DS-160CSM 6.5" STEREO IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	65Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	Dual .75" (1.9cm) silk dome tweeters
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Dual voice coil polypropylene woofer
<b>DIAMETER</b>	9.3" (23.6cm)
<b>CUTOUT DIAMETER</b>	7.99" (20.3cm)
<b>MOUNTING DEPTH</b>	3.99" (10.1cm)
<b>WEIGHT</b>	7 lbs (3.18kg)
<b>INSTALLATION KIT</b>	IK-650-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-C (sold separately)

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 3.7 kg  
8.1 lbs

PART NUMBER

1064168



NOTES:



- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### DS-160C 6.5" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	65Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>COVERAGE ANGLE</b>	100°
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) silk dome tweeter mated to a round Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Polypropylene woofer
<b>DIAMETER</b>	9.3" (23.6cm)
<b>CUTOUT DIAMETER</b>	7.99" (20.3cm)
<b>MOUNTING DEPTH</b>	3.99" (10.7cm)
<b>WEIGHT</b>	7 lbs (3.18 kg)
<b>INSTALLATION KIT</b>	IK-650-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-C (sold separately)

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 3.7 kg  
8.1 lbs

PART NUMBER

1064165



NOTES:

## IN-WALL



- In-wall speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### DS-160W 6.5" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	65Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Silk dome tweeter mated to a round Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) Polypropylene Woofer
<b>DIMENSIONS</b>	9.11" W x 14.23" H x 3.46" D (23.1cm H x 36.1cm W x 8.8cm D)
<b>MOUNTING DEPTH</b>	3.31" (8.4cm)
<b>CUTOUT DIMENSIONS</b>	7.87" W X 12.99" H (20cm W X 33cm H)
<b>WEIGHT</b>	7.2 lbs. (3.25kg)
<b>INSTALLATION KIT</b>	IK-650-W II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-W (sold separately)

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 3.75 kg  
8.26 lbs

PART NUMBER

1064163



NOTES:



### DS-250W LCR DUAL 5.25" IN-WALL LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	45Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	60W /240W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Silk dome tweeter mated to a round Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	Dual 5.25" (13.34cm) Polypropylene Woofers
<b>DIMENSIONS</b>	7.65" W x 17.54" H x 3.12" D (19.4cm H x 44.5cm W x 7.9cm D)
<b>MOUNTING DEPTH</b>	2.97" (7.5cm)
<b>CUTOUT DIMENSIONS</b>	6.42" W X 16.3" H (16.3cm W X 41.4cm H)
<b>WEIGHT</b>	6.5lbs (2.95kg)
<b>INSTALLATION KIT</b>	IK-502-W II (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 3.5 kg  
 7.7 lbs

**PART NUMBER**  
 1064164



NOTES:

- In-wall speaker for home theater or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

## CUSTOM SERIES

Using the same design principals of our premium architectural and box speaker lines, the all new Klipsch Custom series delivers true Klipsch sound for distributed audio or small home theater. These speakers utilize the exclusive SkyHook™ tool-free installation system to engage the dog legs automatically when the speaker is inserted into the cutout hole with a preset clamping force, eliminating the possibility of overtorquing. This fast, easy installation system reduces install time by up to 75%.



## IN-CEILING



### CS-16C II 6.5" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	57Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	35W /140W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) polymer dome tweeter
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) poly woofer
<b>DIAMETER</b>	9.3" (23.6cm)
<b>CUTOUT DIAMETER</b>	7.99" (20.3cm)
<b>MOUNTING DEPTH</b>	3.91" (9.9cm)
<b>WEIGHT</b>	5.1 lbs (2.3 kg)
<b>INSTALLATION KIT</b>	IK-650-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-C (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 2.6 kg  
 5.7 lbs

**PART NUMBER**  
 1064160



NOTES:

- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille



- In-ceiling speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### CS-18C 8" IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	55Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	40W /160W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) polymer dome tweeter
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) polymer woofer
<b>DIAMETER</b>	10.88" (27.6cm)
<b>CUTOUT DIAMETER</b>	9.57" (24.3cm)
<b>MOUNTING DEPTH</b>	4.17" (10.6cm)
<b>WEIGHT</b>	7.4 lbs (3.36 kg)
<b>INSTALLATION KIT</b>	IK-800-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-800-C (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 2.9 kg  
6.4 lbs

**PART NUMBER**

1064161



**NOTES:**



- In-ceiling stereo speaker for distributed audio
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### CS-16CSM 6.5" STEREO IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	57Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	40W /160W
<b>HIGH FREQUENCY DRIVER</b>	Dual .75" (1.9cm) polymer dome tweeters
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) dual voice coil polymer woofer
<b>DIAMETER</b>	9.3" (23.6cm)
<b>CUTOUT DIAMETER</b>	7.99" (20.3cm)
<b>MOUNTING DEPTH</b>	3.99" (10.1cm)
<b>WEIGHT</b>	7 lbs (3.18 kg)
<b>INSTALLATION KIT</b>	IK-650-C II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-C (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 7.5 kg  
16.5 lbs

**PART NUMBER**

1064162



**NOTES:**

## IN-WALL



- In-wall speaker for home theater, distributed audio or 2-channel listening
- SkyHook™ ultra-fast Installation System
- Flat, magnetic grille

### CS-16W 6.5" IN-WALL SPEAKER

<b>FREQUENCY RESPONSE</b>	57Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	40W /160W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) polymer tweeter
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.5cm) polymer woofer
<b>DIMENSIONS</b>	9.11" W x 14.23" H x 3.43" D (23.1cm H x 36.1cm W x 8.7cm D)
<b>MOUNTING DEPTH</b>	3.28" (8.3cm)
<b>CUTOUT DIMENSIONS</b>	7.87" W X 12.99" H (20cm W X 33cm H)
<b>WEIGHT</b>	7.2 lbs. (3.25kg)
<b>INSTALLATION KIT</b>	IK-650-W II (sold separately)
<b>FIRE RATED ENCLOSURE</b>	ME-650-W (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.75 kg  
8.26lbs

**PART NUMBER**

1064159



**NOTES:**

# SHALLOW DEPTH SPEAKERS

Creating a benchmark in architectural audio excellence, the Reference Series shallow depth in-ceiling architectural speakers deliver a level of realism and subtlety that surpasses and even intimidates competing designs. With ultra-slim 50mm back boxes, these speakers belie their size with full, detailed sound in any installation.

• Ultra-slim in-ceiling speakers • Great performance in any installation



- Ultra-slim in-ceiling speaker
- 50mm deep fire-rated back box
- Flat, magnetic grille - round and square grilles included

## SLM-5400-C 4" SHALLOW DEPTH IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	90Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>RECOMMENDED AMP POWER</b>	50W
<b>POWER HANDLING</b>	120W Peak
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) titanium dome tweeter with a round Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	4" (10.2cm) Cerametallic™ woofer
<b>DIAMETER</b>	9.516" (24.17cm)
<b>CUTOUT DIAMETER</b>	8.15" (20.7cm)
<b>MOUNTING DEPTH</b>	1.97" (5cm)
<b>WEIGHT</b>	7.4 lbs. (3.35kg)
<b>INSTALLATION KIT</b>	IK-650-C or IK-650-C II (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.6 kg  
8 lbs

**PART NUMBER**

1063201

**NOTES:**



- Ultra-slim in-ceiling speaker
- 50mm deep fire-rated back box
- Flat, magnetic grille - round and square grilles included

## SLM-3400-C 4" SHALLOW DEPTH IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	92Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	90dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>RECOMMENDED AMP POWER</b>	50W
<b>POWER HANDLING</b>	120W Peak
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) aluminum dome tweeter with a round Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	4" (10.2cm) IMG woofer
<b>DIAMETER</b>	10.516" (26.7cm)
<b>CUTOUT DIAMETER</b>	8.15" (20.7cm)
<b>MOUNTING DEPTH</b>	1.97" (5cm)
<b>WEIGHT</b>	7.4 lbs. (3.35kg)
<b>INSTALLATION KIT</b>	IK-650-C or IK-650-C II (sold separately)

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 3.6 kg  
8 lbs

**PART NUMBER**

1063200

**NOTES:**



**Klipsch**  
REFERENCE

ULTRA-SLIM SPEAKERS

**GREAT DEPTH  
FROM THE  
SHALLOWS**



ULTRA-SLIM 50MM (1.97")

#### THIN IS IN

Some of the most compact in-ceiling speakers on the market, the SLM-5400-C and SLM-3400-C feature an ultra-slim (50mm) depth with a fully enclosed back box and legendary KLIPSCH acoustic performance. The thin fire-rated metal back box provides exceptional sound isolation and low frequency response.

Featuring the same powerful acoustic design as the legendary Reference architectural series, these speakers bring classic Klipsch sound to an ultra-slim package. The flat, magnetic, minimum bezel grille gives a modern and discreet look for great sound in the spaces where we live.



# ACCESSORIES

At Klipsch, we make products to suit any need, but we also realize that not everyone will use our products in the same way. That's why we offer stylish and useful accessories to protect your investment, customize your speaker installations and maximize your listening experience.



## INSTALLATION KITS



### IK-810-C INSTALLATION BRACKET FOR 8" IN-CEILING LCR SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	1.3 kg   3 lbs
FOR USE WITH	PRO-180RPC LCR

PART NUMBER

1065326



### IK-802-W INSTALLATION BRACKET FOR THX ULTRA2

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	1.3 kg   3 lbs
FOR USE WITH	THX Ultra2 in-wall speakers and in-wall subwoofer

PART NUMBER

1007229



### IK-800-C INSTALLATION BRACKET FOR 8" IN-CEILING SPEAKER

SHIPPING QUANTITY	Each
SHIPPING WEIGHT	.45 kg   1 lbs
FOR USE WITH	PRO-180RPC, PRO-18RC, DS-180CDT, CS-18C

PART NUMBER

1001180



### IK-800-C II INSTALLATION BRACKET FOR 8" IN-CEILING SPEAKER

SHIPPING QUANTITY	10-Pack
SHIPPING WEIGHT	4.5 kg   10 lbs
FOR USE WITH	PRO-180RPC, PRO-18RC, DS-180CDT, DS-180CSM, CS-18C

PART NUMBER

1065322



### IK-800-W INSTALLATION BRACKET FOR 8" IN-WALL SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-180RPW, PRO-18RW

PART NUMBER

1001178



### IK-800-W II INSTALLATION BRACKET FOR 8" IN-WALL SPEAKER

SHIPPING QUANTITY	10-Pack
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-180RPW, PRO-18RW

PART NUMBER

1065324



### PRO-16-SBR INSTALLATION BRACKET FOR 6.5" IN-CEILING SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-160RPC, PRO-16RC, DS-160C, DS-160CDT, CS-16C II

PART NUMBER

1001179



**IK-650-C II** INSTALLATION BRACKET FOR 6.5" IN-CEILING SPEAKER

SHIPPING QUANTITY	10-Pack
SHIPPING WEIGHT	4.5 kg   10 lbs
FOR USE WITH	PRO-160RPC, PRO-16RC, DS-160C, DS-160CDT, DS-160CSM, CS-16C II, CS-16CSM

PART NUMBER	1065321
-------------	---------



**IK-650-W** INSTALLATION BRACKET FOR 6.5" IN-WALL SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-160RPW, PRO-16RW

PART NUMBER	1001177
-------------	---------



**IK-650-W II** INSTALLATION BRACKET FOR 6.5" IN-WALL SPEAKER

SHIPPING QUANTITY	10-Pack
SHIPPING WEIGHT	4.5 kg   10 lbs
FOR USE WITH	PRO-160RPW, PRO-16RW, DS-160W, CS-16W

PART NUMBER	1065323
-------------	---------



**IK-502-W** INSTALLATION BRACKET FOR DUAL 5.25" IN-WALL LCR SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-250RPW LCR, PRO-25RW LCR

PART NUMBER	1009682
-------------	---------



**IK-502-W II** INSTALLATION BRACKET FOR DUAL 5.25" IN-WALL LCR SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-250RPW LCR, PRO-25RW LCR, DS-250W LCR

PART NUMBER	1065325
-------------	---------



**IK-402-W** INSTALLATION BRACKET FOR DUAL 4" IN-WALL LCR SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-24RW LCR

PART NUMBER	1065328
-------------	---------



**IK-400-C** INSTALLATION BRACKET FOR 3.5" IN-CEILING SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-14RC

PART NUMBER	1065329
-------------	---------



**IK-400-W** INSTALLATION BRACKET FOR 4" IN-WALL SPEAKER

SHIPPING QUANTITY	Pair
SHIPPING WEIGHT	0.9 kg   2 lbs
FOR USE WITH	PRO-14RW

PART NUMBER	1065329
-------------	---------



## PRO-800SW VENT BOOT KIT

SHIPPING QUANTITY	Each
SHIPPING WEIGHT	0.89 kg   1.98lbs
VENT AREA DIMENSION	4" x 10" (10.16 cm x 25.4 cm)
FOR USE WITH	PRO-800SW

PART NUMBER

1064948

## GRILLE BRACKETS



### IK-800-C GRILLE BRACKET

GRILLE ATTACHMENT KIT FOR 8" IN-CEILING INSTALLATION KITS

SHIPPING QUANTITY	10 pack (grilles included)
SHIPPING WEIGHT	4.5 kg   10 lbs
FOR USE WITH	IK-800-C, IK-800-C II

PART NUMBER

1065331



### IK-650-C GRILLE BRACKET

GRILLE ATTACHMENT KIT FOR 6.5" IN-CEILING INSTALLATION KITS

SHIPPING QUANTITY	10 pack (grilles included)
SHIPPING WEIGHT	4.5 kg   10 lbs
FOR USE WITH	IK-650-C, IK-650-C II

PART NUMBER

1065330

## FIRE RATED ENCLOSURES



Designed to meet UL2043 requirements for installation in plenum spaces  
 Tested to comply with: UL 263 • ASTM E119-98 • NFPA 251 • UBC 7-1 • ULC CAN/ULC-S101-M89

### ME-800-C FIRE RATED ENCLOSURE

SHIPPING QUANTITY	Single
SHIPPING WEIGHT	7.25 kg   16 lbs
FOR USE WITH	All 8-inch round in-ceiling models

PART NUMBER

1001184



Designed to meet UL2043 requirements for installation in plenum spaces  
 Tested to comply with: UL 263 • ASTM E119-98 • NFPA 251 • UBC 7-1 • ULC CAN/ULC-S101-M89

### ME-650-C FIRE RATED ENCLOSURE

SHIPPING QUANTITY	Single
SHIPPING WEIGHT	4.1 kg   9.2 lbs
FOR USE WITH	All 6.5-inch round in-ceiling models

PART NUMBER

1001183

# THX® ULTRA™ SERIES

Utilizing the same professional-grade technology as our renowned commercial theater systems, every Klipsch THX® Ultra speaker brings real cinema sound to the comforts of home. Expertly delivering the raw explosiveness and fine detail of any film format, these products - which can be assembled in a variety of combinations - will forever shatter your expectations for home theater performance.

• THX Ultra certified • For rooms 3,000 cubic feet or larger



## LCR SPEAKERS



- THX Ultra certified LCR speaker
- Front-firing port for low bass extension
- Top-of-the-line internal wiring
- Omni-Mount suspension points facilitate wall or ceiling mounting using standard hardware

### KL-650-THX DUAL 6.5" LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	48 Hz - 20 kHz +/- 3dB
<b>SENSITIVITY</b>	97dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	150W/600W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	1400Hz
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) magnetically shielded, titanium-dome compression driver with 9.6 oz ceramic magnet structure with a 10" x 6" rectangular 90°x 60° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Two 6.5" (16.5cm) magnetically shielded, Cerametallic cone, cast aluminum frame woofers
<b>ENCLOSURE MATERIAL</b>	Medium density fiberboard (MDF)
<b>ENCLOSURE TYPE</b>	Bass reflex via front-firing port
<b>INPUTS</b>	Two sets of binding post speaker terminals (connected via bass strap jumpers)
<b>HEIGHT</b>	15" (38.1cm)
<b>WIDTH</b>	17" (43.2cm)
<b>DEPTH</b>	12.5" (31.8cm)
<b>WEIGHT</b>	39 lbs (17.7 kg)
<b>MOUNTING</b>	4-bolt pattern 1/4"-20 threaded inserts
<b>FINISH</b>	Galaxy Black cabinet with Black anodized aluminum fascia

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 20.6 kg  
 45.5 lbs

**PART NUMBER**

1010651 (Left)  
 1010650 (Right)



**NOTES:**

### KL-525-THX DUAL 5.25" LCR SPEAKER

<b>FREQUENCY RESPONSE</b>	80 Hz - 20 kHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	100W/400W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	1500Hz
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) magnetically shielded, titanium-dome compression driver with 9.6 oz ceramic magnet structure with a 10" x 6" rectangular 90°x 60° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Two 5.25" (13.3cm) magnetically shielded, Cerametallic cone, cast aluminum frame woofers
<b>ENCLOSURE MATERIAL</b>	Medium density fiberboard (MDF)
<b>ENCLOSURE TYPE</b>	Sealed
<b>INPUTS</b>	Two sets of binding post speaker terminals (connected via bass strap jumpers)
<b>HEIGHT</b>	12.75" (32.4cm)
<b>WIDTH</b>	16" (40.6cm)
<b>DEPTH</b>	12.5" (31.8cm)
<b>WEIGHT</b>	32 lbs (14.5kg)
<b>MOUNTING</b>	4-bolt pattern 1/4"-20 threaded inserts
<b>FINISH</b>	Galaxy Black cabinet with Black anodized aluminum fascia

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 20.6 kg  
 45.5 lbs

**PART NUMBER**

1010648



**NOTES:**



- THX Ultra certified LCR speaker
- Sealed enclosure
- Top-of-the-line internal wiring
- Omni-Mount suspension points facilitate wall or ceiling mounting using standard hardware

SURROUND



- THX Ultra certified LCR speaker
- Wide Dispersion Surround Technology (WDST)
- Top-of-the-line internal wiring
- Omni-Mount suspension points facilitate wall or ceiling mounting using standard hardware

**KS-525-TX** DUAL 5.25" SURROUND

<b>FREQUENCY RESPONSE</b>	80 Hz - 20 kHz +/- 3dB
<b>SENSITIVITY</b>	96dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	100W/400W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	2100Hz
<b>HIGH FREQUENCY DRIVER</b>	Two 1" (2.5cm) magnetically shielded, titanium-dome compression driver with 9.6 oz ceramic magnet structure with a 5" square 90°x 60° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Two 5.25" (13.3cm) magnetically shielded, Cerametallic cone, cast aluminum frame woofers
<b>ENCLOSURE MATERIAL</b>	Medium density fiberboard (MDF)
<b>ENCLOSURE TYPE</b>	Sealed
<b>INPUTS</b>	Two sets of binding post speaker terminals (connected via bass strap jumpers)
<b>HEIGHT</b>	13.75" (35cm)
<b>WIDTH</b>	13" (33cm)
<b>DEPTH</b>	8.5" (21.6cm)
<b>WEIGHT</b>	20 lbs (9.1kg)
<b>MOUNTING</b>	Dual keyholes and 2-bolt pattern 1/4"-20 threaded inserts
<b>FINISH</b>	Galaxy Black cabinet with Black anodized aluminum fascia

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 20.3 kg  
 44.75 lbs

**PART NUMBER**  
 1010647



NOTES:

SUBWOOFER



- THX Ultra certified passive subwoofer
- Front-firing port
- Top-of-the-line internal wiring
- For use with KA-1000-TX amplifier

**KW-120-TX** 12" PASSIVE SUBWOOFER

<b>FREQUENCY RESPONSE</b>	20 Hz - 200 Hz +/- 3dB
<b>MAX ACOUSTIC OUTPUT</b>	130dB @ 30Hz, 122dB @ 20Hz, 112dB @ 15Hz 1/8 space, 1 meter (2 enclosures side-by-side per THX Ultra2)
<b>AMPLIFIER</b>	Use only with KA-1000-TX
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>LOW FREQUENCY DRIVER</b>	12" (30.5cm) front-firing, Cerametallic cone, cast aluminum frame drivers with a 240oz ceramic magnet structure
<b>ENCLOSURE MATERIAL</b>	Medium density fiberboard (MDF)
<b>ENCLOSURE TYPE</b>	Bass reflex via front-firing port
<b>INPUTS</b>	1 Speakon NL2 jack and included cable
<b>HEIGHT</b>	20.25" (51.4cm)
<b>WIDTH</b>	17.75" (45.1cm)
<b>DEPTH</b>	17.75" (31.8cm)
<b>WEIGHT</b>	80 lbs (36.3kg)
<b>FINISH</b>	Galaxy Black cabinet with Black anodized aluminum fascia

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 93 lbs

**PART NUMBER**  
 1010649



NOTES:

THX® ULTRA™ AMPLIFIER



- Delivers 1000 watts into a 4 Ohm load
- Can support two high performance subwoofers
- Finished in black with a machined aluminum front panel and knobs

**KA-1000-TX** THX CERTIFIED CLASS D SUBWOOFER AMPLIFIER

<b>FREQUENCY RESPONSE</b>	20 Hz - 1 kHz +/- 3dB
<b>AMPLIFIER</b>	High-Efficiency Class D
<b>AMPLIFIER POWER</b>	FTC Rated Power: 500W into 8 ohms, 1000W into 4 ohms, 20Hz-1kHz @ <1.5% THD Dynamic Power: 2050W into 8 ohms, 3025W into 4 ohms @ 5% THD
<b>AUTO POWER ON</b>	2 second ON delay, 15 minute off delay
<b>LOW PASS CROSSOVER</b>	Continuously variable from 40Hz-120Hz, 24dB/octave slope above 120z (non-THX mode)
<b>INPUTS</b>	2 Gold-plated RCA phono jacks
<b>OUTPUTS</b>	2 Gold-plated RCA phono jacks (unfiltered) 2 Speakon® NL2 jacks
<b>DIMENSIONS</b>	4.75" (12.1cm) H x 17.5" (44.5cm) W x 12.25" (31.1cm) D
<b>FINISH</b>	Black anodized aluminum
<b>VOLTAGE</b>	110/120 VAC 60Hz
<b>EXPORT VOLTAGE</b>	230 VAC 50/60Hz
<b>FEATURES</b>	THX On/Off Boundary Gain Compensation On/Off

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 31 lbs

**PART NUMBER**  
 221200080011 (120V)  
 221200080012 (230V)

NOTES:



Masters of the  
*Minimal*

*High performance, low profile - Legendary Reference Premiere Sound*

**Klipsch**<sup>®</sup>  
REFERENCE  
PREMIERE

DESIGNER  
ON-WALL

# REFERENCE PREMIERE DESIGNER ON-WALL

Klipsch Reference Premiere Designer On-Wall is a first class low-profile home audio solution, offering minimalist home theater system speakers that add beauty to any room. With its modern-day aesthetic and legendary sonic signature – great sound has never looked so good.



- 3-Channel passive LCR sound bar
- Wall-mountable or table-mountable with included glass base
- True Reference Premiere acoustics in a slim on-wall solution

## RP-440D SB SLIM ON-WALL 3-CHANNEL PASSIVE LCR SOUND BAR

<b>FREQUENCY RESPONSE</b>	65Hz - 24Hz +/-3dB
<b>SENSITIVITY</b>	92 dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	50W/200W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	2200Hz
<b>HIGH FREQUENCY DRIVER</b>	Three 1" (2.54cm) Titanium diaphragm compression drivers mated to a 90° x 90° square Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	Four 3.5" (8.89 cm) active long-throw cerametallic woofers (One each for left and right channels, two for center channel)
<b>ENCLOSURE MATERIAL</b>	Injection molded polymer
<b>ENCLOSURE TYPE</b>	Bass-reflex
<b>INPUTS</b>	Single wire 5-way binding posts (3 sets)
<b>HEIGHT</b>	6" (15.24cm)
<b>WIDTH</b>	42" (106.68cm)
<b>DEPTH</b>	2.4" (6.10cm)
<b>WEIGHT</b>	12 lbs (5.44 kg)
<b>FINISH</b>	Matte black paint

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 6 kg  
13.22 lbs

**PART NUMBER**

1064178 (Black)

**NOTES:**

## RP-640D SLIM ON-WALL LCRS SPEAKER

<b>FREQUENCY RESPONSE</b>	55Hz - 24kHz +/-3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	75W/300W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	2200Hz
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium diaphragm compression driver mated to a 90° x 90° square Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	Two 3.5" (8.89 cm) active long-throw cerametallic woofers Four 3.5" (8.89 cm) passive cerametallic radiators
<b>ENCLOSURE MATERIAL</b>	Injection molded polymer
<b>ENCLOSURE TYPE</b>	Bass-reflex via passive radiators
<b>INPUTS</b>	Single wire 5-way binding posts
<b>HEIGHT</b>	28.5" (72.39cm)
<b>WIDTH</b>	6" (15.24cm)
<b>DEPTH</b>	2.4" (6.1cm)
<b>WEIGHT</b>	8 lbs (3.63 kg)
<b>FINISH</b>	Matte black paint

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 4.1 kg  
9 lbs

**PART NUMBER**

1064179 (Black)

**NOTES:**



- Slim on-wall LCRS speaker
- Wall-mountable or table-mountable with included glass base
- True Reference Premiere acoustics in a slim on-wall solution



### RP-240D SLIM ON-WALL LCRS SPEAKER

<b>FREQUENCY RESPONSE</b>	67Hz - 24kHz +/-3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	75W/300W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	2200Hz
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium diaphragm compression driver mated to a 90° x 90° square Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	Two 3.5" (8.89 cm) long-throw cerametallic woofers
<b>ENCLOSURE MATERIAL</b>	Injection molded polymer
<b>ENCLOSURE TYPE</b>	Bass-reflex
<b>INPUTS</b>	Single wire 5-way binding posts
<b>HEIGHT</b>	16" (40.64cm)
<b>WIDTH</b>	6" (15.24cm)
<b>DEPTH</b>	2.4" (6.1cm)
<b>WEIGHT</b>	5.25lbs (2.38 kg)
<b>FINISH</b>	Matte black paint

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	2.9 kg 6.4 lbs
<b>PART NUMBER</b>	1064180 (Black)

**NOTES:**

- Slim on-wall LCRS speaker
- Wall-mountable or table-mountable with included glass base
- True Reference Premiere acoustics in a slim on-wall solution



### RP-140D SLIM ON-WALL LCRS SPEAKER

<b>FREQUENCY RESPONSE</b>	69Hz - 24kHz +/-3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>POWER HANDLING (CONT/PEAK)</b>	50W/200W
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>CROSSOVER FREQUENCY</b>	2200Hz
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium diaphragm compression driver mated to a 90° x 90° square Tractrix® Horn
<b>LOW FREQUENCY DRIVER</b>	3.5" (8.89 cm) long-throw cerametallic woofer
<b>ENCLOSURE MATERIAL</b>	Injection molded polymer
<b>ENCLOSURE TYPE</b>	Bass-reflex
<b>INPUTS</b>	Single wire 5-way binding posts
<b>HEIGHT</b>	12" (30.48cm)
<b>WIDTH</b>	6" (15.24cm)
<b>DEPTH</b>	2.4" (6.1cm)
<b>WEIGHT</b>	3.75 lbs (1.7 kg)
<b>FINISH</b>	Matte black paint

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	2.2 kg 4.85 lbs
<b>PART NUMBER</b>	1064181 (Black)

**NOTES:**

- Slim on-wall LCRS speaker
- Wall-mountable or table-mountable with included glass base
- True Reference Premiere acoustics in a slim on-wall solution





## CUSTOMIZED HERITAGE THEATER BAR




The Heritage Theater Bar is a passive LCR sound bar that blends the acoustics and classic, nostalgic design legacy of founder Paul W. Klipsch with the most premium materials and latest technologies available today. Assembled in the USA, the Heritage Theater Bar is the perfect combination of sonic performance and architectural elegance. Customizable Heritage Theater Bars range in width from 49.5" to 80". A standard 49.5" model is also available and designed to match most 55" televisions.




### FINISH OPTIONS

	American Walnut		Satin Black Ash
	Natural Cherry		Distressed Oak
	Primed White <i>Ready for Paint</i>		Raw Ash Wood Veneer <i>Ready for Stain</i>

### GRILLE OPTIONS

	Black Knit		Taupe Knit
	Gray Knit		Cream Knit

CUSTOM WIDTH 49.5" - 80"



## CUSTOMIZED HERITAGE THEATER BAR

<b>FREQUENCY RESPONSE</b>	120Hz - 20kHz +/-13 dB
<b>SENSITIVITY</b>	90dB @ 2.83V/1M
<b>MAXIMUM CONTINUOUS OUTPUT</b>	106 dB (112 dB peak)
<b>POWER HANDLING (NOM./PEAK)</b>	75W / 300 W
<b>REC. AMPLIFIER POWER</b>	50W - 150W
<b>NOMINAL IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER</b>	2,800 Hz
<b>HIGH FREQUENCY DRIVER</b>	3/4" (19cm) Titanium diaphragm compression driver mated to a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	Dual 4" (10.2cm) Black Cerametallic woofers
<b>ENCLOSURE MATERIAL</b>	MDF
<b>ENCLOSURE TYPE</b>	Sealed box
<b>INPUTS</b>	Spring loaded input terminals (left, center, right)
<b>GRILLE CLOTH</b>	Black knit
<b>HEIGHT</b>	6.25" (15.9cm)
<b>WIDTH</b>	49.5" (125.7cm) to 80" (203.2cm)
<b>DEPTH</b>	4" (10.2cm)
<b>WEIGHT</b>	26 lbs. (11.8kg)
<b>ACCESSORIES</b>	Low-profile wall hanging bracket and wall mounting template

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:**

**QUICK SHIP**

35 lbs (16 kg)

**CUSTOM**

35-52 lbs (16-24 kg)

**PART NUMBER**

**QUICK SHIP**

American Walnut - 1066275

Satin Black Ash - 1065987

**CUSTOM**

49.5" - 65" - 1066279

65.1" - 80" - 1066277

**NOTES:**

**Klipsch**

*Outdoor*

**SPEAKERS**



# ALL-WEATHER SERIES

When you want to listen to your favorite music by the pool or want to provide background music while you entertain guests on your patio, our line of outdoor speakers has you covered. The Klipsch All-Weather loudspeaker line delivers clear, dynamic performances while providing more sound per watt than comparably sized speakers, allowing for better sound coverage in a smaller package.



- Paintable, UV-resistant ABS enclosure with rustproof aluminum grille
- Supplied with C-style mounting bracket and stainless steel hardware

## AW-650 6.5" ALL-WEATHER SPEAKER

<b>FREQUENCY RESPONSE</b>	70Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	95dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	3400Hz
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5 cm) titanium dome tweeter with a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.5cm) IMG woofer
<b>DIMENSIONS</b>	15" (38.1cm) H x 9.5" (21.4cm) W x 11" (27.9) cm) D
<b>WEIGHT</b>	9 lbs (4.1 kg)
<b>FINISH</b>	Black or White enclosure and grille

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 11.8 kg  
 26 lbs

PART NUMBER
1009316 (Black)
097093000001 (White)

**NOTES:**



- Paintable, UV-resistant ABS enclosure with rustproof aluminum grille
- Supplied with C-style mounting bracket and stainless steel hardware

## AW-525 5.25" ALL-WEATHER SPEAKER

<b>FREQUENCY RESPONSE</b>	80Hz-20KHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2450Hz
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5 cm) titanium dome tweeter with a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	5.25" (13.3cm) IMG woofer
<b>DIMENSIONS</b>	11.8" (30cm) H x 8" (20.3cm) W x 9" (22.9 cm) D
<b>WEIGHT</b>	6.5 lbs (3kg)
<b>FINISH</b>	Black or White enclosure and grille

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 8.1 kg  
 18 lbs

PART NUMBER
1009313 (Black)
097090000001 (White)

**NOTES:**



- Quick, easy installation
- Multipurpose design

## CP-6 5.25" COMPACT HIGH PERFORMANCE SPEAKER

<b>FREQUENCY RESPONSE</b>	70Hz-22KHz +/- 3dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	3000Hz
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	.75" (1.9cm) aluminum dome tweeter with a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	5.25" (13.3cm) long-throw IMG woofer
<b>TERMINALS</b>	Front baffle mounted accessed via rear pull-through
<b>DIMENSIONS</b>	11.0" (27.9cm) H x 7.0" (17.8cm) W x 6.1" (15.5cm) D
<b>MOUNTING DEPTH</b>	6.9" (17.5cm) D
<b>WEIGHT</b>	5.8 lbs (2.6kg)
<b>FINISH</b>	Black or White enclosure and grille

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 7.8 kg  
 17.19 lbs

PART NUMBER
1016297 (Black)
1060387 (White)

**NOTES:**



- Paintable, UV-resistant ABS enclosure with rustproof aluminum grille
- Supplied with C-style mounting bracket and stainless steel hardware

## AW-400 4" ALL-WEATHER SPEAKER

<b>FREQUENCY RESPONSE</b>	91Hz-20kHz +/- 3dB
<b>SENSITIVITY</b>	91dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>CROSSOVER FREQUENCY</b>	2940Hz
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5 cm) titanium dome tweeter with a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	4" (10.2cm) IMG woofer
<b>DIMENSIONS</b>	9.5" (24.1cm) H x 6.5" (16.5cm) W x 7.25" (18.4 cm) D
<b>WEIGHT</b>	5 lbs (2.3 kg)
<b>FINISH</b>	White enclosure and grille

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 5.5 kg  
 12.1 lbs

**PART NUMBER**  
 09708500001

**NOTES:**

## PROFESSIONAL SERIES LANDSCAPE SPEAKERS

The new Klipsch Landscape Series is a horn-loaded, all-weather, durable, low-distortion, high-efficiency system - designed from the ground up with 70 years of high-performance audio experience by one of the most legendary and reliable audio companies in the world.

- Landscape Satellites and Subwoofers for full-range outdoor performance • 70V/100V/8 Ohm compatibility
- UV-resistant enclosures



- All-new custom Tractrix® Horn provides ultra-wide 105° horizontal dispersion
- 50 watt, 70V/100V multi-tap transformer with 8-ohm bypass
- All-weather durability - IP45 rating

## PRO-650T-LS 6.5" LANDSCAPE SATELLITE

<b>FREQUENCY RANGE</b>	100Hz - 24kHz +/- 3dB 92Hz - 30kHz +/- 6dB 77Hz - 35kHz +/- 10dB
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Aluminum Dome Tweeter mated to an all new 105° custom Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) IMG Woofer
<b>SENSITIVITY</b>	90 dB @ 2.83V/1 meter
<b>COVERAGE ANGLE</b>	105°
<b>POWER HANDLING</b>	100W Peak
<b>70V / 100V TAP SETTINGS</b>	70V: 6.25W, 12.5W, 25W, 50W 100V: 12.5W, 25W, 50W 8 Ohm Bypass
<b>ENCLOSURE MATERIAL</b>	UV Treated, Glass-Filled ABS Cabinet
<b>FINISH</b>	Brown Matte, Paintable
<b>PRODUCT DIMENSIONS</b>	8.27" x 8.82" x 11.02" (210mm x 224mm x 280mm)
<b>PRODUCT WEIGHT</b>	7 lbs (3.18 kg)
<b>ACCESSORIES</b>	PRO-18-GS 18" Ground Stake (PN: 1063448) (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 4.5 kg  
 10 lbs

**PART NUMBER**  
 1063139

**NOTES:**



- All-new custom Tractrix® Horn provides ultra-wide 105° horizontal dispersion
- 50 watt, 70V/100V multi-tap transformer with 8-ohm bypass
- All-weather durability - IP45 rating

## PRO-500T-LS 5" LANDSCAPE SATELLITE

<b>FREQUENCY RANGE</b>	130Hz - 30kHz +/- 3dB 113Hz - 32kHz +/- 6dB 93Hz - 36kHz +/- 10dB
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Aluminum Dome Tweeter mated to an all new 105° custom Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	5" (12.7cm) IMG Woofer
<b>SENSITIVITY</b>	88 dB @ 2.83V/1 meter
<b>COVERAGE ANGLE</b>	105°
<b>POWER HANDLING</b>	60W Peak
<b>70V / 100V TAP SETTINGS</b>	70V: 3.75W, 7.5W, 15W, 30W 100V: 7.5W, 15W, 30W 8 Ohm Bypass
<b>ENCLOSURE MATERIAL</b>	UV Treated, Glass-Filled ABS Cabinet
<b>FINISH</b>	Brown Matte, Paintable
<b>PRODUCT DIMENSIONS</b>	6.3" x 6.85" x 8.5" (160mm x 174mm x 216mm)
<b>PRODUCT WEIGHT</b>	5 lbs (2.27 kg)
<b>ACCESSORIES</b>	PRO-10-GS 10" Ground Stake (PN: 1063447) (sold separately)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 3.6 kg  
 8 lbs

**PART NUMBER**  
 1063137

**NOTES:**



- Long-throw 12" IMG woofer
- Dual voice coil design for transformerless 70V/100V/8 Ohm compatibility
- All-weather durability - IP45 rating

### PRO-12SW-LS 12" DIRECT BURIAL SUBWOOFER

<b>FREQUENCY RANGE</b>	34Hz -100Hz +/- 3dB 29Hz -110Hz +/- 6dB 25Hz -125Hz +/- 10dB
<b>SYSTEM TYPE</b>	Band Pass Full Burial
<b>WOOFER</b>	12" (30.48cm) IMG Dual Voice Coil
<b>SENSITIVITY</b>	90 dB @ 2.83V/1 meter
<b>POWER HANDLING</b>	250W
<b>IMPEDANCE</b>	70V @ 300W (Transformerless) 8 Ohm Stereo 4 Ohm Mono
<b>ENCLOSURE MATERIAL</b>	Canopy: Rustproof, UV Resistant Aluminum Cabinet: Heavy Duty, High Impact Polyethylene
<b>FINISH</b>	Canopy: Metallic Brown, Paintable Cabinet: Matte Black, Paintable
<b>PRODUCT DIMENSIONS</b>	25" x 16.14" x 26.42" (635mm x 410mm x 671mm)
<b>PRODUCT WEIGHT</b>	55 lbs (25 kg)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 34 kg  
75 lbs

**PART NUMBER**  
1063141

**NOTES:**



- Long-throw 10" IMG woofer
- Dual voice coil design for transformerless 70V/100V/8 Ohm compatibility
- All-weather durability - IP45 rating

### PRO-10SW-LS 10" HALF BURIAL SUBWOOFER

<b>FREQUENCY RANGE</b>	47Hz -103Hz +/- 3dB 40Hz -110Hz +/- 6dB 33Hz -123Hz +/- 10dB
<b>SYSTEM TYPE</b>	Band Pass Half Burial
<b>WOOFER</b>	10" (25.4cm) IMG Dual Voice Coil
<b>SENSITIVITY</b>	90 dB @ 2.83V/1 meter
<b>POWER HANDLING</b>	200W
<b>IMPEDANCE</b>	70V @ 250W (Transformerless) 8 Ohm Stereo 4 Ohm Mono
<b>ENCLOSURE MATERIAL</b>	Canopy: Rustproof, UV Resistant Aluminum Cabinet: Heavy Duty, High Impact Polyethylene
<b>FINISH</b>	Canopy: Metallic Brown, Paintable Cabinet: Matte Black, Paintable
<b>PRODUCT DIMENSIONS</b>	21.85" x 16.10" x 16.10" (555mm x 409mm x 409mm)
<b>PRODUCT WEIGHT</b>	35 lbs (15.91 kg)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 22.6 kg  
50 lbs

**PART NUMBER**  
1063140

**NOTES:**

## ACCESSORIES



### PRO-18-GS 18" GROUND STAKE

<b>MATERIAL</b>	Ground Stake: Glass-Filled (25%) ABS Security Plate: Galvanized Stamped Steel
<b>INCLUDED IN-BOX</b>	18" Ground Stake, 7" Security Plate, Installation Manual
<b>FINISH</b>	Brown Matte, Paintable
<b>PRODUCT DIMENSIONS</b>	17.99" x 3.35" x 3.35" (457mm x 85mm x 85mm)
<b>PRODUCT WEIGHT</b>	2 lbs (0.91 kg)
<b>RECOMMENDED FOR USE WITH</b>	PRO-650T-LS 6.5" Landscape Satellite (PN: 1063139)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 1.3 kg  
3 lbs

**PART NUMBER**  
1063448

**NOTES:**



### PRO-10-GS 10" GROUND STAKE

<b>MATERIAL</b>	Ground Stake: Glass-Filled (25%) ABS Security Plate: Galvanized Stamped Steel
<b>INCLUDED IN-BOX</b>	10" Ground Stake, 7" Security Plate, Installation Manual
<b>FINISH</b>	Brown Matte, Paintable
<b>PRODUCT DIMENSIONS</b>	11.81" x 3.35" x 3.35" (300mm x 85mm x 85mm)
<b>PRODUCT WEIGHT</b>	2 lbs (0.91 kg)
<b>RECOMMENDED FOR USE WITH</b>	PRO-500T-LS 5" Landscape Satellite (PN: 1063137)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 1.3 kg  
3 lbs

**PART NUMBER**  
1063447

**NOTES:**

NEW



## PRO-1-SM

<b>FOR USE WITH</b>	PRO-500T-LS (1063137) and PRO-650T-LS (1063139)
<b>CONSTRUCTION</b>	Rustproof aluminum parts with stainless steel hardware
<b>MAXIMUM PITCH</b>	45° up, 90° down
<b>PITCH INCREMENTS</b>	15°
<b>MAXIMUM PAN</b>	100° clockwise, 100° counterclockwise
<b>WEIGHT</b>	1.2 lbs / .54 kg
<b>DIMENSIONS</b>	1.68" x 11.12" x 4.13" (4.3cm x 29.5cm x 10.5cm)
<b>PACKED AS</b>	Eaches
<b>FINISH</b>	Satin Black
<b>ACCESSORIES (NOT INCLUDED)</b>	5/16" Washers (2) and Mounting Hardware 1" Tree Strap Square U-Bolt for Pole Mounting (1.25" Minimum Width)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 10 lbs

PART NUMBER
1063139

**NOTES:**

## PROFESSIONAL SERIES ROCK SPEAKERS

With IMG woofers and Tractrix horn-loaded Aluminum Dome Tweeters, the Pro Series rock speakers use the same high performance acoustic design philosophies of our legendary indoor products, bringing the world's most dynamic, powerful, detailed sound to your outdoor living space. From small residential systems to massive commercial installs, the Klipsch Pro Series rock speakers are designed to make any installation job quick and easy. For distributed line application, the Pro Series rock speakers feature a 70V/100V multi-tap transformer with 8 ohm bypass, allowing for exceptional balance at any listening location - all selectable from an easily accessible, tool-free rotary switch on the back of the speaker.

- Rock satellites and subwoofer for full-range outdoor performance • 70V/100V/8 Ohm compatibility
- UV-resistant enclosures



- Rock subwoofer speaker
- Dual voice coil design for transformerless 70V/100V capability with 8-ohm bypass
- UV-resistant, mechanically reinforced fiberglass cabinet

## PRO-10SW-RK 10" ROCK SUBWOOFER

<b>FREQUENCY RANGE</b>	47Hz - 103Hz +/- 3dB 40Hz - 110Hz +/- 6dB 33Hz - 123Hz +/- 10dB
<b>SYSTEM TYPE</b>	Sealed box
<b>WOOFER</b>	10" (25.4cm) IMG Dual Voice Coil
<b>SENSITIVITY</b>	90 dB @ 2.83V/1 meter
<b>POWER HANDLING</b>	200W
<b>IMPEDANCE</b>	70V @ 250W (Transformerless) 8 Ohm Stereo 4 Ohm Mono
<b>ENCLOSURE MATERIAL</b>	UV Treated Fiberglass
<b>FINISH</b>	Granite or Sandstone
<b>PRODUCT DIMENSIONS</b>	13.39" x 18.43" x 20.67" (340mm x 468mm x 525mm)
<b>PRODUCT WEIGHT</b>	30 lbs (13.6 kg)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 16 kg  
35.4 lbs

PART NUMBER
1063232 (Granite)
1063231 (Sandstone)

**NOTES:**



- All-new custom Tractrix® Horn provides ultra-wide 105° horizontal dispersion
- 70V/100V multi-tap transformer with 8-ohm bypass
- UV-resistant, mechanically reinforced fiberglass cabinet

### PRO-650T-RK 6.5" 2-WAY ROCK SATELLITE

<b>FREQUENCY RANGE</b>	100Hz - 24kHz +/- 3dB 92Hz - 30kHz +/- 6dB 77Hz - 35kHz +/- 10dB
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Aluminum Dome Tweeter mated to an all new 105° custom Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) IMG Woofer
<b>SENSITIVITY</b>	90 dB @ 2.83V/1 meter
<b>COVERAGE ANGLE</b>	105°
<b>POWER HANDLING</b>	100W Peak
<b>70V / 100V TAP SETTINGS</b>	70V: 6.25W, 12.5W, 25W, 50W 100V: 12.5W, 25W, 50W 8 Ohm Bypass
<b>ENCLOSURE MATERIAL</b>	UV Treated Fiberglass
<b>FINISH</b>	Granite or Sandstone
<b>PRODUCT DIMENSIONS</b>	10.91" x 9.65" x 13.43" (277mm x 245mm x 341mm)
<b>PRODUCT WEIGHT</b>	11 lbs (4.98 kg)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 6.6 kg  
14.7 lbs

PART NUMBER	
1063230 (Granite)	
1063229 (Sandstone)	

**NOTES:**



- All-new custom Tractrix® Horn provides ultra-wide 105° horizontal dispersion
- 70V/100V multi-tap transformer with 8-ohm bypass
- UV-resistant, mechanically reinforced fiberglass cabinet

### PRO-500T-RK 5" 2-WAY ROCK SATELLITE

<b>FREQUENCY RANGE</b>	130Hz - 30kHz +/- 3dB 113Hz - 32kHz +/- 6dB 93Hz - 36kHz +/- 10dB
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Aluminum Dome Tweeter mated to an all new 105° custom Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	5" (12.7cm) IMG Woofer
<b>SENSITIVITY</b>	88 dB @ 2.83V/1 meter
<b>COVERAGE ANGLE</b>	105°
<b>POWER HANDLING</b>	60W Peak
<b>70V / 100V TAP SETTINGS</b>	70V: 3.75W, 7.5W, 15W, 30W 100V: 7.5W, 15W, 30W 8 Ohm Bypass
<b>ENCLOSURE MATERIAL</b>	UV Treated Fiberglass
<b>FINISH</b>	Granite or Sandstone
<b>PRODUCT DIMENSIONS</b>	9.21" x 9.72" x 10.43" (234mm x 247mm x 265mm)
<b>PRODUCT WEIGHT</b>	8 lbs (3.62 kg)

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 5.1 kg  
11.2 lbs

PART NUMBER	
1063228 (Granite)	
1063227 (Sandstone)	

**NOTES:**

**Klipsch** KDA-1000

**Klipsch** KDA-1000

**Klipsch** KDA-1000

**Klipsch** KDA-1000

**Klipsch** KDA-1000



**Klipsch**  
*Amplifiers*



# KLIPSCH DSP MULTI-ZONE AMPLIFIERS

The Klipsch KDA Series DSP Amplifiers deliver legendary Klipsch power and performance in a sleek, high-tech, one rack solution. The KDA Amplifiers boast class G power, for clean dynamic power in any type or size of installation. With 2-way IP Network control drivers and 70V/100V and low impedance compatibility, the Klipsch DSP Multi-Zone Amplifiers provide maximum installation flexibility.



- High performance power platform
- 70V/100V and low impedance compatibility
- Flexible I/O
- State-of-the-art DSP control and set-up
- Ethernet port for 2-Way IP Ethernet Control

## KDA-1000 4 IN X 4 OUT 1000W DSP AMPLIFIER

<b>AMPLIFIER TYPE</b>	High efficiency class G/H
<b>AMPLIFIER POWER</b>	1000 watts total system power   4 x 250 watts per channel   2 x 500
<b>INPUTS</b>	Balanced: 4 x Phoenix line level (up to 12 AWG wire)   Unbalanced: 4 x RCA line level
<b>IP CONTROL</b>	Control4   CRESTRON   ELAN   RS   SUC
<b>OUTPUTS</b>	4 x Phoenix speaker level (up to 12 AWG wire)   4 x RCA line level (throughs)
<b>INPUT SENSITIVITY</b>	750mV balanced   0dBu
<b>INPUT IMPEDENCE</b>	Balanced 40k
<b>THD</b>	<1% @ rated output
<b>SIGNAL TO NOISE</b>	-100dB below rated output
<b>ENCLOSURE MATERIAL</b>	Front face: ABS plastic   Case: Machine formed steel
<b>RACK UNIT</b>	1RU
<b>PRODUCT DIMENSIONS</b>	1.73" (44mm) x 19.02" (483mm) x 14.29" (363mm)
<b>PRODUCT WEIGHT</b>	15 lbs. (6.82 kg)
<b>MOUNTING</b>	Removable 1RU rack ears   removable rubber feet
<b>BUILT FROM</b>	2016

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 18 lbs

PART NUMBER

1063258 (120V)

NOTES:



- High performance power platform
- 70V/100V and low impedance compatibility
- Flexible I/O
- State-of-the-art DSP control and set-up
- Ethernet port for 2-Way IP Ethernet Control

## KDA-500 4 IN X 4 OUT 500W DSP AMPLIFIER

<b>AMPLIFIER TYPE</b>	High efficiency class G/H
<b>AMPLIFIER POWER</b>	500 watts total system power   4 x 125 watts per channel   2 x 250
<b>INPUTS</b>	Balanced: 4 x Phoenix line level (up to 12 AWG wire)   Unbalanced: 4 x RCA line level
<b>IP CONTROL</b>	Control4   CRESTRON   ELAN   RS   SUC
<b>OUTPUTS</b>	4 x Phoenix speaker level (up to 12 AWG wire)   4 x RCA line level (throughs)
<b>INPUT SENSITIVITY</b>	750mV balanced   0dBu
<b>INPUT IMPEDENCE</b>	Balanced 40k
<b>THD</b>	<1% @ rated output
<b>SIGNAL TO NOISE</b>	-100dB below rated output
<b>ENCLOSURE MATERIAL</b>	Front face: ABS plastic   Case: Machine formed steel
<b>RACK UNIT</b>	1RU
<b>PRODUCT DIMENSIONS</b>	1.73" (44mm) x 19.02" (483mm) x 14.29" (363mm)
<b>PRODUCT WEIGHT</b>	15 lbs. (6.82 kg)
<b>MOUNTING</b>	Removable 1RU rack ears   removable rubber feet
<b>BUILT FROM</b>	2016

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 18 lbs


PART NUMBER

1063257 (120V)

NOTES:

## CUSTOM DSP INTERFACE

Customize Klipsch DSP Multi-Zone Amplifiers through streamlined web-based menus - including Klipsch speaker presets - for one-click optimization.

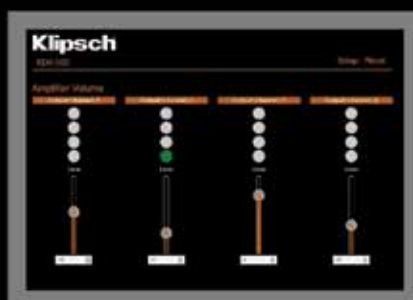

## THX® ULTRA2™ AMPLIFIERS



- THX Ultra2 certified subwoofer amplifier
- Can support two high performance subwoofers
- Finished in black with a machined aluminum front panel and knobs

### KA-1000-THX THX CERTIFIED CLASS D SUBWOOFER AMPLIFIER

<b>FREQUENCY RESPONSE</b>	20 Hz - 1 kHz +/- 3dB
<b>AMPLIFIER</b>	High-Efficiency Class D
<b>AMPLIFIER POWER</b>	FTC Rated Power: 500W into 8 ohms, 1000W into 4 ohms, 20Hz-1kHz @ <1.5% THD Dynamic Power: 2050W into 8 ohms, 3025W into 4 ohms @ 5% THD
<b>AUTO POWER ON</b>	2 second ON delay, 15 minute off delay
<b>LOW PASS CROSSOVER</b>	Continuously variable from 40Hz-120Hz, 24dB/octave slope above 120z (non-THX mode)
<b>INPUTS</b>	2 Gold-plated RCA phono jacks
<b>OUTPUTS</b>	2 Gold-plated RCA phono jacks (unfiltered) 2 Speakon® NL2 jacks
<b>DIMENSIONS</b>	4.75" (12.1cm) H x 17.5" (44.5cm) W x 12.25" (31.1cm) D
<b>FINISH</b>	Black anodized aluminum
<b>VOLTAGE</b>	110/120 VAC 60Hz
<b>EXPORT VOLTAGE</b>	230 VAC 50/60Hz
<b>FEATURES</b>	THX On/Off Boundary Gain Compensation On/Off

<b>SHIPPING QUANTITY:</b> Single
<b>SHIPPING WEIGHT:</b> 31 lbs
<b>PART NUMBER</b>
221200080011 (120V)

NOTES:

## REFERENCE AMPLIFIERS



- EQ preset for use with the RW-5802 subwoofer
- Selectable signal-sensing or voltage triggered auto-on/off circuit
- Line and speaker level inputs

### RSA-500 500W/4 OHM DIGITAL HYBRID SUBWOOFER AMPLIFIER

<b>AMPLIFIER TYPE</b>	Bash Digital Hybrid
<b>AMPLIFIER POWER</b>	FTC Rated Power: 500W continuous into 4 ohms @ <2% THD    Dynamic Power: 1000W
<b>FRONT CONTROLS</b>	Volume and Variable Crossover
<b>REAR CONTROLS</b>	Phase Switch (0/180), EQ Selector, Trigger Input, Power Mode Selector, Main Power Switch
<b>INPUTS</b>	L/R and LFE Line-level RCA jacks L/R High-level speaker binding posts
<b>OUTPUTS</b>	L/R and LFE Line-level RCA jacks (unfiltered) L/R speaker binding posts
<b>DIMENSIONS</b>	3.5" (8.9cm) H x 16.8" (42.7cm) W
<b>DIMENSIONS WITH FEET</b>	3.8" (9.6cm) H x 16.8" (42.7cm) W
<b>WEIGHT</b>	17.5 lbs (7.9kg)
<b>VOLTAGE</b>	110/120 VAC 60Hz
<b>FINISH</b>	Black Anodized Brushed Aluminum
<b>ACCESSORIES</b>	Rack Ears (included) *For use only with RW-5802

<b>SHIPPING QUANTITY:</b> Single
<b>SHIPPING WEIGHT:</b> 21 lbs
<b>PART NUMBER</b>
1001188

NOTES:

## PROFESSIONAL AMPLIFIERS



- Bridgeable 2-channel amplifier
- Full-range or low-pass operation
- Daisy chain capability

## PRO-200A 2 X 100W STEREO/SUBWOOFER AMPLIFIER

<b>RATED POWER OUTPUT</b>	2 x 100 Watts (Stereo) into 4 ohm Load 200 Watts (BTL) into 8 ohm Load
<b>TOTAL HARMONIC DISTORTION</b>	<0.1%
<b>SIGNAL-TO-NOISE RATIO</b>	>100dB
<b>CROSSOVER FREQUENCY</b>	@ Min position 18.5-55.2Hz 40Hz/0dB ref @ Max position 18.2-168.8Hz 40Hz/0dB ref
<b>AUTO TURN ON SENSITIVITY</b>	5mV +/-2mV Full Range 1KHz 5mV +/-2mV Input 50 Hz
<b>DELAY "OFF" TIME</b>	8 minutes
<b>LINE OUT FREQ. RESPONSE</b>	20Hz +/-5K - 20 KHz +/-5K 1KHz/0dB ref
<b>INPUT IMPEDANCE LINE IN</b>	9.2K ohm +/-5%
<b>MAX. NOISE+HUM VOL MAX</b>	<1.0mV, Input Shorted
<b>POWER REQUIREMENT</b>	115V 60Hz or 220 - 240V 50Hz
<b>DIMENSIONS</b>	5.5" (14cm) H 5.69" (14.5cm) W 12.75" (32.4cm) D
<b>CLEARANCE FOR VENTILATION</b>	Top: Min. 0.375" (10mm)   Back: Min. 2" (50mm)
<b>WEIGHT</b>	11 lbs (5.3kg)

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 13 lbs

PART NUMBER

1062388

NOTES:

## AMAZON ECHO INPUT AMPLIFIERS

NEW



## KVA-110

<b>AMPLIFIER POWER</b>	110W Total System Power, 2 x 55W per channel
<b>AMPLIFIER TYPE</b>	Class D
<b>INPUTS</b>	Amazon Echo Input (3.5mm Audio Input and Micro-USB Power)
<b>OUTPUTS</b>	2 x Phoenix Speaker Level (Recommended 16/2 wire), Subwoofer LFE
<b>INSTALLATION</b>	Pre-construction - double gang box, Retrofit - doglegs (included)
<b>CUTOUT DIMENSIONS</b>	3.875" x 3.875" (9.8cm x 9.8cm)
<b>PRODUCT DIMENSIONS</b>	4.92" x 4.92" x 1.75" (12.5cm x 12.5cm x 4.4cm)
<b>SHIPPING DIMENSIONS</b>	7.125" x 5.25" x 3" (18.1cm x 13.3cm x 11.2cm)
<b>INPUT POWER</b>	24V, 3A
<b>POWER CONNECTION</b>	DC Input Wall Plate
<b>ACCESSORIES</b>	DC Input Wall Plate, Optical/Analog Input Wall Plate, Subwoofer Output Plate, Doglegs and hardware, AC Adapter

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 1.06 lbs

PART NUMBER

120V: 1068198

NOTES:

NEW



## KVA-40

<b>AMPLIFIER POWER</b>	40W Total System Power, 2 x 20W per channel
<b>AMPLIFIER TYPE</b>	Class D
<b>INPUTS</b>	Amazon Echo Input (3.5mm Audio Input and Micro-USB Power)
<b>OUTPUTS</b>	2 x Phoenix Speaker Level (Recommended 16/2 wire)
<b>INSTALLATION</b>	Pre-construction - double gang box, Retrofit - doglegs (included)
<b>CUTOUT DIMENSIONS</b>	3.875" x 3.875" (9.8cm x 9.8cm)
<b>PRODUCT DIMENSIONS</b>	4.92" x 4.92" x 1.75" (12.5cm x 12.5cm x 4.4cm)
<b>SHIPPING DIMENSIONS</b>	7.125" x 5.25" x 3" (18.1cm x 13.3cm x 11.2cm)
<b>INPUT POWER</b>	24V, 3A
<b>POWER CONNECTION</b>	DC Input Wall Plate
<b>ACCESSORIES</b>	DC Input Wall Plate, Doglegs and hardware, AC Adapter

SHIPPING QUANTITY: Single

SHIPPING WEIGHT: 1.06 lbs

PART NUMBER

120V: 1068200

NOTES:



**Klipsch** LOW CONTROL™  
APP



Take  
**Total Control**  
of your Low End

*Robust custom tuning with app-controlled compact subwoofers*

**Klipsch**  
C-SERIES

SUBWOOFERS

## C-SERIES



- High performance app controlled compact subwoofer
- Klipsch LowControl App for iOS/Android provides automatic room correction and fully customizable EQ with presets
- Supports multiple input types
- Ethernet input for IP control
- Piano gloss finish for premium look

### C-310ASWi 10" HIGH PERFORMANCE COMPACT SUBWOOFER

<b>FREQUENCY RANGE</b>	25-150Hz +/- 3dB
<b>SYSTEM TYPE</b>	Bass-reflex via dual side-firing passive radiators
<b>WOOFER</b>	10" (20.3cm) Active / Dual 10" passive
<b>MAXIMUM OUTPUT</b>	116dB @ 35Hz
<b>POWER HANDLING</b>	400W RMS
<b>ENCLOSURE MATERIAL</b>	MDF
<b>INPUTS</b>	Line level RCA, Balanced XLR, High level, Wireless (with optional transmitter sold separately)
<b>IP CONTROL</b>	Control4
<b>PRODUCT DIMENSIONS</b>	13.42" x 13.42" x 13.42" (341mm x 341mm x 341mm)
<b>PRODUCT WEIGHT</b>	39 lbs (17.69 kg)
<b>FINISH</b>	Piano gloss black

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 18.2 kg  
40.1 lbs

**PART NUMBER**

1064619 (Black)

**NOTES:**



- High performance app controlled compact subwoofer
- Klipsch LowControl App for iOS/Android provides automatic room correction and fully customizable EQ with presets
- Supports multiple input types
- Ethernet input for IP control
- Piano gloss finish for premium look

### C-308ASWi 8" HIGH PERFORMANCE COMPACT SUBWOOFER

<b>FREQUENCY RANGE</b>	28-150Hz +/- 3dB
<b>SYSTEM TYPE</b>	Bass-reflex via dual side-firing passive radiators
<b>WOOFER</b>	8" (20.3cm) Active / Dual 8" passive
<b>MAXIMUM OUTPUT</b>	110dB @ 35Hz
<b>POWER HANDLING</b>	300W RMS
<b>ENCLOSURE MATERIAL</b>	MDF
<b>INPUTS</b>	Line level RCA, Balanced XLR, High level, Wireless (with optional transmitter sold separately)
<b>IP CONTROL</b>	Control4
<b>PRODUCT DIMENSIONS</b>	11.22" x 11.22" x 11.22" (285mm x 285mm x 285mm)
<b>PRODUCT WEIGHT</b>	27 lbs (12.25 kg)
<b>FINISH</b>	Piano gloss black

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 12.75 kg  
28.1lbs

**PART NUMBER**

1064615 (Black)

**NOTES:**



# Secret Weapon

Pro-1200SW

*Hidden full-size enclosure - high output, exceptional bass*

**Klipsch**  
REFERENCE  
PREMIERE

PROFESSIONAL  
SERIES



- Full stud-bay-in-wall subwoofer for new construction
- Ideal for home cinema or high performance distributed audio
- Easily installs into any standard stud-bay



- 10" Long-throw Cerametallic™ woofer for superior low frequency response
- Performs as the anchor for a home theater system or a premium distributed audio solution
- MDF enclosure
- Flat, paintable, white magnetic grille
- Suitable for retrofit or new construction applications
- Compatible with the KDA-500 amplifier (see page 47)



- In-ceiling bandpass dual voice coil subwoofer for new construction or retrofit
- Minimal visual footprint
- Round and square grilles included
- Floor vent boot kit accessory (sold separately)

## PRO-1200SW 12" IN-WALL SUBWOOFER

<b>FREQUENCY RANGE</b>	21Hz -100Hz +/- 3dB *
<b>SYSTEM TYPE</b>	Sealed Box
<b>WOOFER</b>	12" (25.4cm) Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	112dB @ 70Hz
<b>POWER HANDLING</b>	250W RMS / 600W Peak
<b>IMPEDANCE</b>	8 Ohm
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	65.75" H x 15.69" W x 3.47" D (1670.05mm x 398mm x 100mm)
<b>MOUNTING DEPTH</b>	3.4" (88.138mm)
<b>CUTOUT DIMENSIONS</b>	14.25" x 14.25" (361.95mm x 361.95mm)
<b>PRODUCT WEIGHT</b>	35.5 lbs (16.1 kg)

\* With Klipsch KDA Amplifier DSP Preset

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 16.6 kg  
36.6 lbs

**PART NUMBER**

1064595

**NOTES:**

## PRO-1000SW 10" IN-WALL SUBWOOFER

<b>FREQUENCY RANGE</b>	24-100Hz +/- 3dB *
<b>SYSTEM TYPE</b>	Sealed Box
<b>WOOFER</b>	10" (25.4cm) Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	109dB @ 70Hz
<b>POWER HANDLING</b>	200W RMS / 500W Peak
<b>IMPEDANCE</b>	8 Ohm
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	21.97" x 17.56" x 4.0" (558mm x 448mm x 102mm)
<b>MOUNTING DEPTH</b>	3.94" (100mm)
<b>CUTOUT DIMENSIONS</b>	20.24" x 14.41" (514.096mm x 366.014mm)
<b>PRODUCT WEIGHT</b>	20.3 lbs (9.2 kg)

\* With Klipsch KDA Amplifier DSP Preset

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 9.8 kg  
21.6 lbs

**PART NUMBER**

1063646

**NOTES:**

## PRO-800SW 8" IN-CEILING BAND PASS SUBWOOFER

<b>FREQUENCY RANGE</b>	38Hz -125Hz +/- 3dB
<b>SYSTEM TYPE</b>	Bandpass via flexible port tube
<b>WOOFER</b>	8" (203cm) Dual Voice Coil Long-Throw Cerametallic™
<b>MAXIMUM OUTPUT*</b>	103dB @ 70Hz
<b>POWER HANDLING</b>	125W RMS / 300W Peak
<b>IMPEDANCE</b>	2 x 8 Ohm
<b>ENCLOSURE MATERIAL</b>	MDF
<b>FINISH</b>	Black Polymer Veneer with White, Paintable Grille
<b>PRODUCT DIMENSIONS</b>	Cabinet: 6.9" H x 21.1" W x 14.2" D (176mm x 536mm x 361mm) Grille: 5" (127mm)
<b>MOUNTING DEPTH</b>	7" (178mm)
<b>CUTOUT DIAMETER</b>	4.25" (108mm)
<b>PRODUCT WEIGHT</b>	22.1 lbs (10.1 kg)
<b>ACCESSORIES</b>	PRO-800SW Vent Boot Kit (Sold Separately)

\* With Klipsch KDA Amplifier DSP Preset

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 10.6 kg  
23.4 lbs

**PART NUMBER**

1064594

1064948 (Floor Vent Boot Kit)

**NOTES:**



- THX Ultra2 certified passive subwoofer
- Front-firing port
- Top-of-the-line internal wiring
- For use with KA-1000-THX amplifier

## KW-120-THX 12" PASSIVE SUBWOOFER

<b>FREQUENCY RESPONSE</b>	20 Hz - 200 Hz +/- 3dB
<b>MAX ACOUSTIC OUTPUT</b>	130dB @ 30Hz, 122dB @ 20Hz, 112dB @ 15Hz 1/8 space, 1 meter (2 enclosures side-by-side per THX Ultra2)
<b>AMPLIFIER</b>	Use only with KA-1000-THX
<b>NOMINAL IMPEDANCE</b>	8 Ohms Compatible
<b>LOW FREQUENCY DRIVER</b>	12" (30.5cm) front-firing, Cerametallic cone, cast aluminum frame drivers with a 240oz ceramic magnet structure
<b>ENCLOSURE MATERIAL</b>	Medium density fiberboard (MDF)
<b>ENCLOSURE TYPE</b>	Bass reflex via front-firing port
<b>INPUTS</b>	1 Speakon NL2 jack and included cable
<b>HEIGHT</b>	20.25" (51.4cm)
<b>WIDTH</b>	17.75" (45.1cm)
<b>DEPTH</b>	17.75" (31.8cm)
<b>WEIGHT</b>	80 lbs (36.3kg)
<b>FINISH</b>	Galaxy Black cabinet with Black anodized aluminum fascia

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 93 lbs

**PART NUMBER**

1010649



**NOTES:**

## COMMERCIAL IN-CEILING

The Klipsch Commercial In-Ceiling series of loudspeakers packs proven materials and wide dispersion horn technology into installer-friendly products. Designed to mix and match with Klipsch CA-T speakers, these IC speakers have been included in a number of major installations nationally – from Bloomingdale's in New York City to Ron Jon Surf Shop in Orlando.



- Tight 75° coverage pattern for high ceiling applications
- 100 watt, low insertion loss, multi-tap transformer for high output and less compression
- 70-volt, 100-volt or low impedance operation selectable via a front baffle switch

## IC-800-T FULL RANGE 8" TWO-WAY IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	49Hz-20KHz +/- 4dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	6.5 ohms (in 8 ohm bypass mode)
<b>POWER HANDLING (CONT/PEAK)</b>	100W /400W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium diaphragm compression driver
<b>LOW FREQUENCY DRIVER</b>	8" (20.32cm) woofer
<b>DIAMETER</b>	9.5" (24.13cm)
<b>CUTOUT DIAMETER</b>	12.625" (32.1cm)
<b>MOUNTING DEPTH</b>	12.75" (32.4cm)
<b>WEIGHT</b>	21 lbs (9.5 kg)
<b>INSTALLATION KIT</b>	061347 (sold separately)
<b>TAP SETTINGS</b>	70V - 100W, 50W, 25W, 12.5W 100V - 100W, 50W, 25W

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 10 kg  
22 lbs

**PART NUMBER**

1062346 (Black)

1062347 (White)

**NOTES:**



### IC-650-T 6.5" IN-CEILING SPEAKER



- Wider, shorter design to fit low ceilings
- 70-volt, 100-volt or 8-ohm operation selectable via a front baffle switch
- Tractrix® Port design for deep bass with less compression

<b>FREQUENCY RESPONSE</b>	50Hz-20KHz +/- 4dB
<b>SENSITIVITY</b>	90dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms
<b>POWER HANDLING (CONT/PEAK)</b>	80W /320W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.5cm) titanium compression tweeter on a modified Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	6.5" (16.51cm) woofer
<b>DIAMETER</b>	11.7" (29.7cm)
<b>CUTOUT DIAMETER</b>	10.125" (25.7cm)
<b>MOUNTING DEPTH</b>	10.1" (25.65cm)
<b>WEIGHT</b>	11.3 lbs (5.12 kg)
<b>INSTALLATION KIT</b>	IK-650-C (sold separately)
<b>TAP SETTINGS</b>	70V - 60W, 30W, 15W, 7.5W 100V - 60W, 30W, 15W

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 11.2 kg  
24.7 lbs

PART NUMBER
1008721 (Black)
1007627 (White)

**NOTES:**

### IC-525-T 5.25" IN-CEILING SPEAKER



- Wider, shorter design to fit low ceilings
- 70-volt, 100-volt or 8-ohm operation selectable via a front baffle switch
- Tractrix® Port design for deep bass with less compression


<b>FREQUENCY RESPONSE</b>	65Hz-20KHz +/- 4dB
<b>SENSITIVITY</b>	89dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) Titanium compression driver on 3.5" (8.89cm) round modified Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	5.25" (16.51cm) woofer
<b>DIAMETER</b>	10.75" (27.3cm)
<b>CUTOUT DIAMETER</b>	9.125" (23.2cm)
<b>MOUNTING DEPTH</b>	8.2" (20.8cm)
<b>WEIGHT</b>	7 lbs. (3.2kg)
<b>INSTALLATION KIT</b>	1010413 (sold separately)
<b>TAP SETTINGS</b>	70V - 30W, 15W, 7.5W, 3.8W 100V - 30W, 15W, 7.5W

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 7.4 kg  
16.3 lbs

PART NUMBER
1008720 (Black)
1007626 (White)

**NOTES:**

### IC-500-T-SC SHALLOW DEPTH 5" 2-WAY IN-CEILING SPEAKER



- Includes 15 watt 70/100 volt multi-tap transformer
- 70-volt, 100-volt or 8-ohm operation selectable via a front baffle switch
- Tractrix® Port design for deep bass with less compression

<b>FREQUENCY RESPONSE</b>	95Hz-20KHz +/- 4dB
<b>SENSITIVITY</b>	87dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium diaphragm compression driver
<b>LOW FREQUENCY DRIVER</b>	5" (12.7cm) woofer
<b>DIAMETER</b>	10.75" (27.3cm)
<b>CUTOUT DIAMETER</b>	9.125" (23.2cm)
<b>MOUNTING DEPTH</b>	4.125" (10.5cm)
<b>WEIGHT</b>	5.5 lbs. (2.5kg)
<b>INSTALLATION KIT</b>	1010413 (sold separately)
<b>TAP SETTINGS</b>	70V - 15W, 7.5W, 3.8W, 1.9W 100V - 15W, 7.5W, 3.8W

**SHIPPING QUANTITY:** Pair  
**SHIPPING WEIGHT:** 6 kg  
13.2 lbs

PART NUMBER
1062344 (Black)
1062345 (White)

**NOTES:**



- 70-volt, 100-volt or 8-ohm operation selectable via front baffle switch
- Tractrix® Port design for deep bass with less compression
- Tractrix® Horn tweeter for smooth sound

### IC-400-T 5" 2-WAY IN-CEILING SPEAKER

<b>FREQUENCY RESPONSE</b>	70Hz - 20kHz +/- 4dB, -10dB 50Hz
<b>SENSITIVITY</b>	86dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohms compatible
<b>POWER HANDLING (CONT/PEAK)</b>	50W /200W
<b>HIGH FREQUENCY DRIVER</b>	1" (2.54cm) titanium diaphragm compression driver on modified Tractrix® horn
<b>LOW FREQUENCY DRIVER</b>	5" (12.7cm) woofer
<b>DIAMETER</b>	10.75" (27.31cm)
<b>CUTOUT DIAMETER</b>	9.125" (23.18cm)
<b>MOUNTING DEPTH</b>	7.3" (18.54cm)
<b>WEIGHT</b>	6.25 lbs. (2.83kg)
<b>TAP SETTINGS</b>	70V - 15W, 7.5W, 3.8W, 1.9W 100V - 15W, 7.5W, 3.8W
<b>INSTALLATION KIT</b>	Mud Ring Kit (Part #1010413) (sold separately) Pendant Housing (Part #1016408 - White) (sold separately) Pendant Housing (Part #1016409 - Black) (sold separately)

<b>SHIPPING QUANTITY:</b>	Pair
<b>SHIPPING WEIGHT:</b>	6.6 kg 14.5 lbs
<b>PART NUMBER</b>	1008719 (Black) 1007625 (White)

**NOTES:**

## PENDANT HOUSINGS

When overhead sound distribution is a challenge due to either a high ceiling or a lack of a suspended ceiling, Klipsch Pendant Housings combine with Klipsch In-Ceiling speakers for an aesthetically pleasing, great sounding solution.

- Aluminum Pendant Housing in Black, White or Paintable for customization
- Perfect for high-ceiling structures or areas with no suspended ceiling for direct, overhead distributed sound
- Includes the necessary mounting hardware for typical suspended installation scenarios



### KPH-800 12.5" PENDANT HOUSING

<b>PACKAGE CONTENTS</b>	One Pendant housing, One 9.5' (2.5m) drop cable with balance cables and S-hooks, One Fast Link cable joiner
<b>ENCLOSURE</b>	1.5mm Aluminum housing
<b>DIMENSIONS</b>	16.8" (42.7cm) Base diameter, 12.5" (31.8cm) Flange diameter, 13.7" (34.8cm) Height
<b>WEIGHT</b>	2.2 lbs (1 kg)
<b>WORKS WITH</b>	IC-800-T, IC-SW-8T2
<b>COLORS</b>	White (paintable)

<b>SHIPPING QUANTITY:</b>	Single
<b>SHIPPING WEIGHT:</b>	1.5 kg 3.3 lbs
<b>PART NUMBER</b>	1063456



### KPH-650 10.3" PENDANT HOUSING

<b>PACKAGE CONTENTS</b>	Two Pendant housings, Two 9.5' (2.5m) drop cables with balance cables and S-hooks, Two Fast Link cable joiners
<b>ENCLOSURE</b>	1.5mm Aluminum housing
<b>DIMENSIONS</b>	12.3" (32.2m) Base diameter, 10.3" (26.2cm) Flange diameter, 11.2" (28.5cm) Height
<b>WEIGHT</b>	2 lbs (0.9 kg)
<b>WORKS WITH</b>	IC-650-TUL
<b>COLORS</b>	Black or White (paintable)

<b>SHIPPING QUANTITY:</b>	Pair
<b>SHIPPING WEIGHT:</b>	4.5 kg 9.9 lbs
<b>PART NUMBER</b>	1063455 (Black) 1063454 (White)



### KPH-525 9.7" PENDANT HOUSING

<b>PACKAGE CONTENTS</b>	Two Pendant housings, Two 9.5' (2.5m) drop cables with balance cables and S-hooks, Two Fast Link cable joiners
<b>ENCLOSURE</b>	1mm Aluminum housing
<b>DIMENSIONS</b>	11.6" (29.5cm) Base diameter, 9.7" (24.6cm) Flange diameter, 9.4" (23.9cm) Height
<b>WEIGHT</b>	1.25 lbs (0.57 kg)
<b>WORKS WITH</b>	IC-400-T, IC-500T-SC, IC-525-TUL
<b>COLORS</b>	Black or White (paintable)

<b>SHIPPING QUANTITY:</b>	Pair
<b>SHIPPING WEIGHT:</b>	1.5 kg 3.3 lbs
<b>PART NUMBER</b>	1016409 (Black) 1016408 (White)

## COMPACT PERFORMANCE SERIES

The Klipsch Compact Performance Series is designed for high-performance sound indoors or out. The CP-6, in paintable Black or White, is designed to quickly wall-mount with the included brackets or rest on a shelf or bookcase in equally appealing form. Traditional Klipsch lifelike sound with Tractrix horns, utilize them for deck or patio sound, as part of a 2-channel music system or as surrounds in a Home Theater system. Their versatility is endless.



- Quick, easy installation
- Multipurpose design

### CP-6T 5.25" COMPACT HIGH PERFORMANCE SPEAKER

<b>FREQUENCY RESPONSE</b>	83Hz-22kHz +/- 3dB
<b>SENSITIVITY</b>	94dB
<b>IMPEDANCE</b>	8 ohm @ 2.83V/1 meter (8 ohm bypass)
<b>CROSSOVER FREQUENCY</b>	3kHz 12dB octave
<b>POWER HANDLING (CONT/PEAK)</b>	75W /300W
<b>HIGH FREQUENCY DRIVER</b>	.75" (1.9cm) aluminum dome tweeter with a 90° x 90° Tractrix Horn
<b>LOW FREQUENCY DRIVER</b>	5.25" (13.3cm) long-throw IMG woofer
<b>TERMINALS</b>	Front baffle mounted accessed via rear pull-through
<b>DIMENSIONS</b>	11.0" (27.9cm) H x 7.0" (17.8cm) W x 6.1" (15.5cm) D
<b>MOUNTING DEPTH</b>	6.9" (17.5cm) D
<b>WEIGHT</b>	6.85 lbs. (3.1kg)
<b>FINISH</b>	Black or White enclosure and grille
<b>TAP SETTINGS</b>	70V - 30W, 15W, 7W, 3.75W 100V - 30W, 15W, 7W, 3.75W

**SHIPPING QUANTITY:** Pair

**SHIPPING WEIGHT:** 7 kg  
15.43 lbs

**PART NUMBER**

1016298 (Black)  
1060388 (White)

**NOTES:**

# COMMERCIAL ALL-WEATHER SERIES

These compact full-range loudspeakers deliver big time sound and worry free performance. Designed for distributed audio applications, these amazing little speakers are equally at home in outdoor or indoor background music and paging applications in both commercial and recreational environments.



## CA-800T ALL-PURPOSE 8" 2-WAY SPEAKER

<b>FREQUENCY RESPONSE</b>	64Hz-17.5kHz +/- 4dB
<b>SENSITIVITY</b>	96dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohm
<b>CROSSOVER FREQUENCY</b>	1.9kHz 12dB octave high-pass / 12dB octave low-pass
<b>POWER HANDLING</b>	100W
<b>HIGH FREQUENCY DRIVER</b>	K-150-A 1" titanium diaphragm compression driver
<b>LOW FREQUENCY DRIVER</b>	K-1183-A 8" woofer with IMG cone
<b>INPUT CONNECTORS</b>	4 position terminal strip
<b>MATERIAL</b>	All-weather ABS plastic enclosure with rustproof aluminum grille
<b>DIMENSIONS</b>	11.125"(28.26cm) H x 15.6.375"(41.53cm) W x 12.31"(31.27cm) D
<b>WEIGHT</b>	18 lbs. (8.16kg)
<b>FINISH</b>	Black or White (paintable)
<b>TAP SETTINGS</b>	70V - 60W, 30W, 15W, 7.5W, 3.75W 100V - 60W, 30W, 15W, 7.5W, 3.75W

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 9.4 kg  
20.7 lbs

**PART NUMBER**

097150000001 (Black)

097097000001 (White)

**NOTES:**

- Built-in 60-watt 70V/100V multi-tap transformer with 8-ohm bypass
- Paintable UV-resistant ABS enclosure with rustproof aluminum grille
- Very high sensitivity and power handling
- 90° x 90° Tractrix® Horn tweeter for clean, clear highs
- Supplied with C-style mounting bracket and stainless steel hardware



## CA-650T ALL-PURPOSE 6.5" 2-WAY SPEAKER

<b>FREQUENCY RESPONSE</b>	69Hz-20kHz +/- 4dB
<b>SENSITIVITY</b>	95dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	8 ohm
<b>CROSSOVER FREQUENCY</b>	1.9kHz 12dB octave high-pass / 12dB octave low-pass
<b>POWER HANDLING</b>	85W
<b>HIGH FREQUENCY DRIVER</b>	K-150-A 1" titanium diaphragm compression driver
<b>LOW FREQUENCY DRIVER</b>	K-1182-A 6.5" woofer with IMG cone
<b>INPUT CONNECTORS</b>	4 position terminal strip
<b>MATERIAL</b>	All-weather ABS plastic enclosure with rustproof aluminum grille
<b>DIMENSIONS</b>	9.5"(24.13cm) H x 15.2"(38.56cm) W x 10.875"(27.62cm) D
<b>WEIGHT</b>	13 lbs. (5.9kg)
<b>FINISH</b>	Black or White (paintable)
<b>TAP SETTINGS</b>	70V - 60W, 30W, 15W, 7.5W, 3.75W 100V - 60W, 30W, 15W, 7.5W

**SHIPPING QUANTITY:** Single

**SHIPPING WEIGHT:** 7.1 kg  
15.6 lbs

**PART NUMBER**

097148000001 (Black)

097092000001 (White)

**NOTES:**

- Built-in 60-watt 70V/100V multi-tap transformer with 8-ohm bypass
- Very high sensitivity and power handling
- 6.5" IMG cone woofer and a 1" Titanium dome tweeter
- 90° x 90° Tractrix® Horn tweeter for clean, clear highs
- Paintable UV-resistant ABS enclosure with rustproof aluminum grille



- Built-in 30-watt 70V/100V multi-tap transformer with 8-ohm bypass
- Very high sensitivity and power handling
- 90° x 90° Tractrix® Horn tweeter for clean, clear highs
- Paintable UV-resistant ABS enclosure with rustproof aluminum grille
- Supplied with C-style mounting bracket and stainless steel hardware

### CA-525T ALL-PURPOSE 5.25" 2-WAY SPEAKER

<b>FREQUENCY RESPONSE</b>	75Hz-15kHz +/- 4dB
<b>SENSITIVITY</b>	94dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	6 ohm
<b>CROSSOVER FREQUENCY</b>	2.9kHz 18dB octave high-pass / 12dB octave low-pass
<b>POWER HANDLING</b>	75W
<b>HIGH FREQUENCY DRIVER</b>	K-150-A 1" titanium diaphragm compression driver
<b>LOW FREQUENCY DRIVER</b>	K-1181-A 5.25" woofer with IMG cone
<b>INPUT CONNECTORS</b>	4 position terminal strip
<b>MATERIAL</b>	All-weather ABS plastic enclosure with rustproof aluminum grille
<b>DIMENSIONS</b>	8.125" (20.64cm) H x 12" (30.48cm) W x 8.875" (22.54cm) D
<b>WEIGHT</b>	9 lbs. (4.1kg)
<b>FINISH</b>	Black or White (paintable)
<b>TAP SETTINGS</b>	70V - 30W, 15W, 7.5W, 3.75W, 1.8W 100V - 30W, 15W, 7.5W, 3.75W

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 5 kg  
11 lbs

PART NUMBER
097147000001 (Black)
097087000001 (White)

**NOTES:**



- Built-in 60-watt 70V/100V multi-tap transformer with 8-ohm bypass
- Paintable UV-resistant ABS enclosure with rustproof aluminum grille
- Supplied with C-style mounting bracket and stainless steel hardware

### CA-800-TSW ALL-PURPOSE 8" SUBWOOFER

<b>FREQUENCY RESPONSE</b>	51Hz-135kHz +/- 4dB
<b>SENSITIVITY</b>	92dB @ 2.83V/1 meter
<b>IMPEDANCE</b>	6 ohm
<b>CROSSOVER FREQUENCY</b>	150Hz 12dB octave
<b>POWER HANDLING</b>	150W
<b>LOW FREQUENCY DRIVER</b>	K-1185-A 8" woofer with IMG cone
<b>INPUT CONNECTORS</b>	4 point terminal strip
<b>MATERIAL</b>	All-weather ABS plastic enclosure with rustproof aluminum grille
<b>DIMENSIONS</b>	11.1" (28.3cm) H x 16.4" (41.5cm) W x 12.3" (31.3cm) D
<b>WEIGHT</b>	20 lbs. (9.07kg)
<b>FINISH</b>	Black or White (paintable)
<b>TAP SETTINGS</b>	70V - 60W, 30W, 15W, 7.5W, 3.75W 100V - 60W, 30W, 15W, 7.5W, 3.75W

**SHIPPING QUANTITY:** Single  
**SHIPPING WEIGHT:** 10.7 kg  
23.6 lbs

PART NUMBER
097149000001 (Black)
097096000001 (White)

**NOTES:**



## WE NEVER, EVER STOP INNOVATING

For 70 years Klipsch Group has designed and engineered its products in-house with some of the most talented, skilled and passionate people in the industry - starting with our founder, Paul W. Klipsch, in a tin shed in Hope, Arkansas. Today, our advanced acoustic research and development continues at our state-of-the-art facility in Indianapolis, Indiana. The world-class Klipsch Design & Technology Center is home to some of the most brilliant minds in consumer electronics and some of the most legendary products the industry has ever heard. We continue to innovate, honoring the principals and ideals of PWK, reaching ever-farther towards that perfect sound.



[VISIT KLIPSCH.COM/CUSTOM](http://KLIPSCH.COM/CUSTOM)

FOLLOW US




©2017 Klipsch Group, Inc. Klipsch, Keepers of the sound, Tractrix, Klipsch Gallery, Klipschorn, La Scala, Heresy, Groove and Stadium are trademarks of Klipsch Group, Inc. registered in the U.S. and other countries, a wholly owned subsidiary of voxco international corporation. The Bluetooth™ word mark and logos are registered trademarks owned by Bluetooth Sig, Inc. and any use of such marks by Klipsch Group, Inc. is under license. The AptX™ software is copyright CSR PLC or its group companies. All rights reserved. The APTX™ mark is a trademark of CSR PLC or one of its companies and may be registered in one or more jurisdictions. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Dolby, Pro Logic, Dolby Atmos and the Double-D symbol are registered trademarks of Dolby Laboratories. For DTS patents, see [HTTP://PATENTS.DTS.COM](http://PATENTS.DTS.COM). Manufactured under license from DTS Licensing Limited. DTS, the symbol, & DTS and the symbol together are registered trademarks, and DTS Digital Surround is a trademark of DTS, Inc. © DTS, Inc. All rights reserved



# KLIPSCH OFFERS FREE DESIGN SERVICES

You need to make the best impression, from the initial job quote through the completed installation. We can help you choose the best Klipsch speakers and components for the application and help design a system that thoroughly impresses.

Send your plans, questions and concepts to us at: [PROSYSTEMDESIGN@KLIPSCH.COM](mailto:PROSYSTEMDESIGN@KLIPSCH.COM)

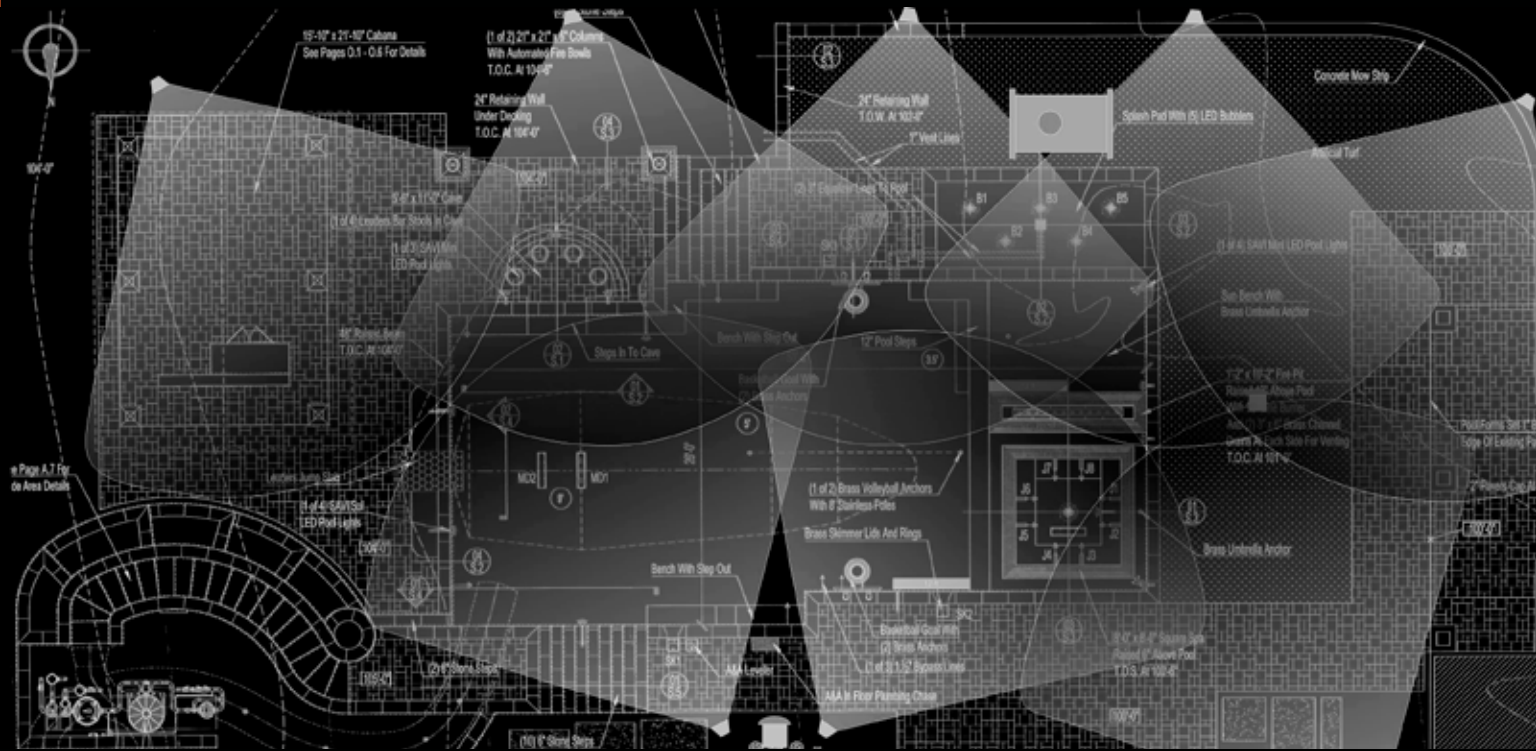


## CI INTEGRATION PARTNERS



[D-TOOLS.COM](http://D-TOOLS.COM)



[PORTAL.IO](http://PORTAL.IO)



[ADDRESS.AFMG.EU](http://ADDRESS.AFMG.EU)

## KLIPSCHDEALER.COM

Same day shipping

Place orders and pay by credit card

Real-time inventory levels, order history and account info

Special deals

**GO TO [KLIPSCHDEALER.COM](http://KLIPSCHDEALER.COM) TO GET SIGNED UP**

## DEALER RESOURCES

Product Marketing Assets - [klipsch.com/share](http://klipsch.com/share)

Product Launch Assets - [klipsch.com/channel](http://klipsch.com/channel)

Firmware - [klipsch.com/firmware](http://klipsch.com/firmware)

Support - [support@klipsch.com](mailto:support@klipsch.com)

Orders - [orders@klipsch.com](mailto:orders@klipsch.com)

Marketing - [channel@klipsch.com](mailto:channel@klipsch.com)



**Klipsch**